
PARALLELIZABLE FEYNMAN-KAC MODELS FOR UNIVERSAL PROBABILISTIC PROGRAMMING

MICHELE BOREALE AND LUISA COLLODI

Università degli Studi di Firenze, Italy.
Dipartimento di Statistica, Informatica, Applicazioni “G. Parenti”.
e-mail address: michele.boreale@unifi.it, luisa.collodi@unifi.it

ABSTRACT. We study provably correct and efficient instantiations of Sequential Monte Carlo (SMC) inference in the context of formal operational semantics of Probabilistic Programs (PPs). We focus on *universal* PPs featuring sampling from arbitrary measures and conditioning/reweighting in unbounded loops. We first equip Probabilistic Program Graphs (PPGs), an automata-theoretic description format of PPs, with an expectation-based semantics over infinite execution traces, which also incorporates trace weights. We then prove a finite approximation theorem that provides bounds to this semantics based on expectations taken over finite, fixed-length traces. This enables us to frame our semantics within a Feynman-Kac (FK) model, and ensures the consistency of the Particle Filtering (PF) algorithm, an instance of SMC, with respect to our semantics. Building on these results, we introduce VPF, a vectorized version of the PF algorithm tailored to PPGs and our semantics. Experiments conducted with a proof-of-concept implementation of VPF show very promising results compared to state-of-the-art PP inference tools.

Keywords: Probabilistic programming, operational semantics, SIMD parallelism, SMC.

1. INTRODUCTION

Probabilistic Programming Languages (PPLs) [34, 7] offer a systematic approach to define arbitrarily complicated probabilistic models. One is typically interested in performing *inference* on these models, given observed data; for example, finding the posterior distribution of the program’s output conditioned on the observed data. Here, in the context of formal operational semantics of Probabilistic Programs, we study provably correct and parallelizable instantiations of Sequential Monte Carlo (SMC) inference.

In terms of formal semantics of PPLs, the denotational approach introduced by Kozen [39] offers a solid mathematical foundation. However, when it comes to practical algorithms for PPL-based inference, the landscape appears somewhat fragmented. On one hand, *symbolic* and *static analysis* techniques, see e.g. [51, 31, 48, 8, 10, 50], yield results with correctness guarantees firmly grounded in the semantics of PPLs but often struggle with scalability. On the other hand, practical languages and inference algorithms predominantly leverage Monte Carlo (MC) *sampling* techniques (MCMC, SMC), which are more scalable but often lack a

Work partially supported by the project SERICS (PE00000014), EU funded NRRP MUR program – NextGenerationEU and by the Department of Excellence project 2023-2027 ReDS - Department of Statistics, Computer Science, Applications - University of Florence.

clear connection to formal semantics [33, 27, 12]. Notable exceptions to this situation include works such as [49, 59, 42, 20, 41], which are discussed in the related work section.

Establishing the consistency of an inference algorithm with respect to a PPL’s formal semantics is not merely a theoretical pursuit. In the context of *universal* PPLs [32], integration of unbounded loops and conditioning with MC sampling, which requires truncating computations at a finite time, presents significant challenges [10]. Additionally, the interplay between continuous and discrete distributions in these PPLs can lead to complications, potentially causing existing sampling-based algorithms to yield incorrect results [59]. In the present work, we establish a precise connection between *Probabilistic Program Graphs (PPGs)*, a general automata-theoretic description format of PPs, and *Feynman-Kac (FK)* models, a formalism for state-based probabilistic processes and observations defined over a finite time horizon [28, Ch.5]. This connection enables us to prove the consistency for PPGs of the *Particle Filtering (PF)* inference algorithm, one of the incarnations of Sequential Monte Carlo approach [28, Ch.10]. In establishing this connection, we adopt a decisively operational perspective, as explained below.

In a PPG (Section 3), computation (essentially, sampling) progresses in successive stages specified by the direct edges of a graph (transitions), with nodes serving as *checkpoints* between stages for *conditioning* on observed data or more generally updating computation weights. The operational semantics of PPGs is formalized in terms of Markov kernels and score functions. Building on this, we introduce a measure-theoretic, infinite-trace semantics (Section 4, with the necessary measure theory reviewed in Section 2). A finite approximation theorem (Section 5) then allows us to relate this trace semantics precisely to a finite-time horizon FK model (Section 6). PF is known to be *consistent* for FK models asymptotically: as the number N of simulated instances (*particles*) tends to infinity, the distribution of these particles converges to the measure defined by the FK model [28, Ch.11]. Therefore, consistency of PF for PPGs will automatically follow.

Our approach yields additional insights. First, the finite approximation theorem holds for a class of *prefix-closed functions* defined on infinite traces: these are the functions where the output only depends on a finite initial segment of the input argument. The finite approximation theorem implies that the expectation of a prefix-closed function, defined on the probability space of infinite traces, can be approximated by the expectation of functions defined over truncated traces, with respect to a measure defined on a suitable FK model. As expectation in a FK model can be effectively estimated, via PF or other algorithms, our finite approximation result lays a sound basis for the statistical model checking of PPs. Second, the automata-theoretic operational semantics of PPGs translates into a *vectorized* implementation of PF, leveraging the fine-grained, SIMD parallelism existing at the level of particles. Specifically, the PPG’s transition function and the score functions are applied simultaneously to the entire vector of N simulated particles at each step. This is practically significant, as modern CPUs and programming languages offer extensive support for vectorization, that may lead to dramatic speedups. We demonstrate this aspect with a prototype vectorized implementation of a PPG-based PF algorithm using TensorFlow [1], called VPF. Experiments comparing VPF with state-of-the-art PPLs on challenging examples from the literature show very promising results (Section 7). Concluding remarks are provided in the final section (Section 8). Proofs and additional technical material have been confined to separate appendices (A, B, C, D).

Main contributions. In summary, our main contributions are as follows.

- (1) A clean operational semantics for PPGs, based on expectation taken over infinite-trace, incorporating conditioning/reweighting.
- (2) A finite approximation theorem linking this semantics to finite traces and FK models, thereby establishing the consistency of PF for PPGs.
- (3) A vectorized version of the PF algorithm based on PPGs, and experimental evidence of its practical scalability and competitiveness.

Related work. With few notable exceptions, most work on the semantics of PPL follows the denotational approach initiated by Kozen [39]; see [7, 11, 26, 34, 35, 36, 52, 53, 54, 56] and references therein for representative works in this area. In this context, a general goal orthogonal to ours, is devising methods to combine and reason on densities. Note that we do not require that a PP induces a density on the probability space of infinite traces.

Relevant to our approach is a series of works by Lunden et al. on SMC inference applied to PPLs. In [42], for a lambda-calculus enriched with an explicit `resample` primitive, consistency of PF is shown to hold, under certain restrictions, independently of the placements of the `resamples` in the code. Operationally, their functional approach is very different from our automata-theoretic one. In particular, they handle suspension and resumption of particles in correspondence of resampling via an implicit use of *continuations*, in the style of webPPL [33] and other PPLs. The combination of functional style and continuations does not naturally lend itself to vectorization. For instance, ensuring that all particles are *aligned*, that is are at a `resample` point of their execution, is an issue that can impact negatively on performance or accuracy. On the contrary, in our automata-theoretic model, placement of `resamples` and alignment are not issues: resampling always happens after each (vectorized) transition step, so all particles are automatically aligned. Note that in PPGs a transition can group together complicated, conditioning free computations; in any case, consistency of PF is guaranteed. In a subsequent work [44, 43], Lunden et al. study concrete implementation issues of SMC. In [44], they consider *PPL Control-Flow Graphs* (PCFGs), a structure intended as a target for the compilation of high-level PPLs, such as their CorePPL. The PCFG model is very similar in spirit to PPGs, however, it lacks a formal semantics. Lunden et al. also offer an implementation of this framework, designed to take advantage of the potential parallelism existing at the level of particles. We compare our implementation with theirs in Section 7.

Aditya et al. prove consistency of Markov Chain Monte Carlo (MCMC) for their PPL R2 [49], which is based on a big-step sampling semantics that considers finite execution paths. No approximation results bridging finite and infinite traces, and hence unbounded loops, is provided. It is also unclear if a big-step semantics would effectively translate into a SIMD-parallel algorithm. Wu et al. [59] provide the PPL Blog with a rigorous measure-theoretic semantics, formulated in terms of Bayesian Networks, and a very efficient implementation of the PF algorithm tailored to such networks. Again, they do not offer results for unbounded loops. In our previous work [20], we have considered a measure theoretic semantics for a PPL with unbounded loops, and provided a finite approximation result and a SIMD-parallel implementation, with guarantees, of what is in effect a *rejection sampling* algorithm. Rejection may be effective for limited forms of conditioning; but it rapidly becomes wasteful and ineffective as conditioning becomes more demanding, so to speak: e.g. when it is repeated in a loop, or the observed data have a low likelihood in the model. Finally, SMCP3 [41] provides a rich measure-theoretic framework for extending the practical Gen language [29] with expressive proposal distributions.

A rich area in the field of PPL focuses on symbolic, exact techniques [51, 31, 48, 8, 10, 50, 37] aiming to obtain termination certificates, or certified bounds on termination probability of PPs, or even exact representations of the posterior distribution; see also [6, 9, 55, 3, 40, 57] for some recent works in this direction. Our goal and methodology, as already stressed, are rather different, as we focus on scalable inference via sampling and the ensuing consistency issues. This is part of a broader research agenda, aimed at developing flexible and scalable formal methods applicable across diverse, probability-related domains, including: dynamical systems with safety-related aspects [13, 14, 15, 16, 17, 19], information leakage and security [25, 24], distributed systems with notions of failure and recovery [18], randomized model counting and testing [23, 45].

The present work is an extended and revised version of the conference paper [22]. The new material here includes: additional examples (Examples 6 and 8), a revised and expanded experimental validation (Section 7, Appendices C, D), detailed proofs (Appendix A), and a more complete description of the standard Particle Filtering algorithm (Appendix B).

2. PRELIMINARIES ON MEASURE THEORY

We review a few basic concepts from measure theory following closely the presentation in the first two chapters of [2], which is a reference for whatever is not explicitly described below. Given a nonempty set Ω , a *sigma-field* \mathcal{F} on Ω is a collection of subsets of Ω that contains Ω , and is closed under complement and under countable disjoint union. The pair (Ω, \mathcal{F}) is called a *measurable space*. A (total) function $f : \Omega_1 \rightarrow \Omega_2$ is *measurable* w.r.t. the sigma-fields $(\Omega_1, \mathcal{F}_1)$ and $(\Omega_2, \mathcal{F}_2)$ if whenever $A \in \mathcal{F}_2$ then $f^{-1}(A) \in \mathcal{F}_1$. We let $\overline{\mathbb{R}} = \mathbb{R} \cup \{-\infty, +\infty\}$ be the set of extended reals, assuming the standard arithmetic for $\pm\infty$ (cf. [2, Sect.1.5.2]), and $\overline{\mathbb{R}}^+$ the set of nonnegative reals including $+\infty$. The *Borel sigma-field* \mathcal{F} on $\Omega = \overline{\mathbb{R}}^m$ is the minimal sigma-field that contains all rectangles of the form $[a_1, b_1] \times \cdots \times [a_n, b_n]$, with $a_i, b_i \in \overline{\mathbb{R}}$. An important case of measurable spaces (Ω, \mathcal{F}) is when $\Omega = \overline{\mathbb{R}}^m$ for some $m \geq 1$ and \mathcal{F} is the Borel sigma-field over Ω . Throughout the paper, “*measurable*” means “*Borel measurable*”, both for sets and for functions. On functions, Borel measurability is preserved by composition and other elementary operations on functions; continuous real functions are Borel measurable. We will let \mathcal{F}_k denote the Borel sigma-field over $\overline{\mathbb{R}}^k$ ($k \geq 1$) when we want to be specific about the dimension of the space.

A *measure* over a measurable space (Ω, \mathcal{F}) is a function $\mu : \mathcal{F} \rightarrow \overline{\mathbb{R}}^+$ that is countably additive, that is $\mu(\cup_{j \geq 1} A_j) = \sum_{j \geq 1} \mu(A_j)$ whenever A_j 's are pairwise disjoint sets in \mathcal{F} . The *Lebesgue integral* of a Borel measurable function f w.r.t. a measure μ [2, Ch.1.5], both defined over a measure space (Ω, \mathcal{F}) , is denoted by $\int_{\Omega} \mu(d\omega) f(\omega)$, with the subscript Ω omitted when clear from the context. When μ is the standard Lebesgue measure, we may omit μ and write the integral as $\int_{\Omega} d\omega f(\omega)$. For $A \in \mathcal{F}$, $\int_A \mu(d\omega) f(\omega)$ denotes $\int_{\Omega} \mu(d\omega) f(\omega) 1_A(\omega)$, where $1_A(\cdot)$ is the indicator function of the set A . We let δ_v denote Dirac's measure concentrated on v : for each set A in an appropriate sigma-field, $\delta_v(A) = 1$ if $v \in A$, $\delta_v(A) = 0$ otherwise. Otherwise said, $\delta_v(A) = 1_A(v)$. Another measure that arises (in connection with discrete distributions) is the counting measure, $\mu_C(A) := |A|$. In particular, for a nonnegative f , we have the equality $\int_A \mu_C(d\omega) f(\omega) = \sum_{\omega \in A} f(\omega)$. A *probability measure* is a measure μ defined on \mathcal{F} such that $\int \mu(d\omega) = 1$. For a given nonnegative measurable function f defined over Ω , its *expectation* w.r.t. a probability measure ν is just its integral: $E_{\nu}[f] = \int \nu(d\omega) f(\omega)$. The following definition is central.

Definition 1 (Markov kernel). *Let $(\Omega_1, \mathcal{F}_1)$ and $(\Omega_2, \mathcal{F}_2)$ be measurable spaces. A function $K : \Omega_1 \times \mathcal{F}_2 \rightarrow \overline{\mathbb{R}}^+$ is a Markov kernel from Ω_1 to Ω_2 if it satisfies the following properties:*

- (1) *for each $\omega \in \Omega_1$, the function $K(\omega, \cdot) : \mathcal{F}_2 \rightarrow \overline{\mathbb{R}}^+$ is a probability measure on $(\Omega_2, \mathcal{F}_2)$;*
- (2) *for each $A \in \mathcal{F}_2$, the function $K(\cdot, A) : \Omega_1 \rightarrow \overline{\mathbb{R}}^+$ is measurable.*

Notationally, we will most often write $K(\omega, A)$ as $K(\omega)(A)$. The following is a standard result about the construction of finite product of measures over a product space¹ $\Omega^t = \Omega \times \cdots \times \Omega$ (t times) for $t \geq 1$ an integer (see Theorem A.1 in the Appendix for a more detailed statement). It is customary to denote the measure μ^t defined by the theorem also as $\mu^1 \otimes K_2 \otimes \cdots \otimes K_t$.

Theorem 1 (product of measures, [2], Th.2.6.7). *Let $t \geq 1$ be an integer. Let μ^1 be a probability measure on Ω and K_2, \dots, K_t be $t-1$ (not necessarily distinct) Markov kernels from Ω to Ω . Then there is a unique probability measure μ^t defined on $(\Omega^t, \mathcal{F}^t)$ such that for every $A_1 \times \cdots \times A_t \in \mathcal{F}^t$ we have: $\mu^t(A_1 \times \cdots \times A_t) = \int_{A_1} \mu^1(d\omega_1) \int_{A_2} K_2(\omega_1)(d\omega_2) \cdots \int_{A_t} K_t(\omega_{t-1})(d\omega_t)$.*

3. PROBABILISTIC PROGRAMS

We first introduce a general formalism for specifying programs, in the form of certain graphs that can be regarded as symbolic finite automata. For this formalism, we introduce then an operational semantics in terms of Markov kernels.

Probabilistic Program Graphs. In defining probabilistic programs, we will rely on a repertoire of basic distributions: continuous, discrete and mixed distributions will be allowed. A crucial point for expressiveness is that a measure may depend on *parameters*, whose value at runtime is determined by the state of the program. To ensure that the resulting programs define measurable functions (on a suitable space), it is important that the dependence between the parameters and the measure be in turn of measurable type. We will formalize this in terms of Markov kernels. Additionally, we will consider score functions, a generalization of 0/1-valued predicates. Formally, we will consider the two families of functions defined below. In the definitions, we will let $m \geq 1$ denote a fixed integer, representing the number of *variables* in the program, conventionally referred to as x_1, \dots, x_m . We will let v range over $\overline{\mathbb{R}}^m$, the content of the program variables in a given state, or *store*.

- *Parametric measures:* Markov kernels $\zeta : \overline{\mathbb{R}}^m \times \mathcal{F}_m \rightarrow [0, 1]$.
- *Score functions:* measurable functions $\gamma : \overline{\mathbb{R}}^m \rightarrow [0, 1]$. A *predicate* is a special case of a score function $\varphi : \overline{\mathbb{R}}^m \rightarrow \{0, 1\}$. An Iverson bracket style notation will be often employed, e.g.: $[x_1 \geq 1]$ is the predicate that on input v yields 1 if $v_1 \geq 1$, 0 otherwise.

For a parametric measure ζ and a store $v \in \overline{\mathbb{R}}^m$, $\zeta(v)$ is a distribution, that can be used to sample a new store $v' \in \overline{\mathbb{R}}^m$ depending on the current program store v . Analytically, ζ may be expressed by, for instance, chaining together sampling of individual components of the store. This can be done by relying on *parametric densities*: measurable functions $\rho : \overline{\mathbb{R}}^m \times \overline{\mathbb{R}} \rightarrow \overline{\mathbb{R}}^+$ such that, for a designated measure μ_ρ , the function $(v, A) \mapsto \int_A \mu_\rho(dr) \rho(v, r)$ ($A \in \mathcal{F}_m$) is a Markov kernel from $\overline{\mathbb{R}}^m$ to $\overline{\mathbb{R}}$. This is explained via the following example.

¹We shall freely identify language-theoretic *words* with *tuples*.

Example 1. Fix $m = 2$. Consider the Markov kernel defined as follows, for each $x_1, x_2 \in \overline{\mathbb{R}}$ and $A \in \mathcal{F}_2$

$$\zeta(x_1, x_2)(A) := \int \mu_1(dr_1) (\rho_1(x_1, x_2, r_1) \cdot \int \mu_2(dr_2) \rho_2(r_1, x_2, r_2) 1_A(r_1, r_2)) \quad (3.1)$$

where:

- $\mu_1 = \mu_C$ is the counting measure;
- $\rho_1(x_1, x_2, r) = \frac{1}{2} 1_{\{x_1\}}(r) + \frac{1}{2} 1_{\{x_2\}}(r)$ is the density of a discrete distribution on $\{x_1, x_2\}$;
- $\mu_2 = \mu_L$ is the ordinary Lebesgue measure;
- $\rho_2(x_1, x_2, r) = N(x_1, x_2, r) := \frac{1}{|x_2|\sqrt{2\pi}} \exp(-\frac{1}{2}(\frac{r-x_1}{|x_2|})^2)$ is the density of the Normal distribution of mean x_1 and standard deviation² $|x_2|$.

The function ζ is a parametric measure: concretely, it corresponds to first sampling uniformly r_1 from the set $\{x_1, x_2\}$, then sampling r_2 from the Normal distribution of mean r_1 and s.d. $|x_2|$ (if $|x_2|$ is positive and finite, otherwise from a default distribution). Rather than via (3.1), we will describe ζ via the following more handy notation:

$$\begin{aligned} r_1 &\sim \rho_1(x_1, x_2); \\ r_2 &\sim \rho_2(r_1, x_2); \\ \zeta(x_1, x_2)(A) &:= \int \mu_1(dr_1) (\rho_1(x_1, x_2, r_1) \cdot \int \mu_2(dr_2) \rho_2(r_1, x_2, r_2) 1_A(r_1, r_2)) \end{aligned}$$

(or listed left-right). Note that the sampling order from top to bottom is relevant here.

In fact, as far as the formal framework of PPGs introduced below is concerned, how the parametric measures ζ 's are analytically described is irrelevant. From the practical point of view, it is important we know how to (efficiently) sample from the measure $\zeta(v)$, for any v , in order for the inference algorithms to be actually implemented (see Section 6). In concrete terms, $\zeta(v)$ might represent the (possibly unknown) distribution of the outputs in $\overline{\mathbb{R}}^m$ returned by a piece of code, when invoked with input v . Another important special case of parametric measure is the following. For any $v = (v_1, \dots, v_m) \in \overline{\mathbb{R}}^m$, $r \in \overline{\mathbb{R}}$ and $1 \leq i \leq m$, let $v[r@i] := (v_1, \dots, r, \dots, v_m)$ denote the tuple where v_i has been replaced by r . Consider the parametric measure $\zeta(v) = \delta_{v[g(v)@i]}$, where $g : \overline{\mathbb{R}}^m \rightarrow \overline{\mathbb{R}}$ is a measurable function. In programming terms, this corresponds to the deterministic *assignment* of the value $g(v)$ to the variable x_i . We will describe this ζ as: $x_i := g(x_1, \dots, x_m)$.

In the definition of PPG below, one may think of the computation (sampling) taking place in successive stages on the edges (transitions) of the graph, with nodes serving as *checkpoints* (a term we have borrowed from [42]) between stages for conditioning on observed data — or, more generally, re-weighting the score assigned to a computation. The edges also account for the control flow among the different stages via predicates computed on the store of the source nodes.

Definition 2 (PPG). Fix $m \geq 1$. A Probabilistic Program Graph (PPG) on $\overline{\mathbb{R}}^m$ is a 4-tuple $\mathbf{G} = (\mathcal{P}, E, \text{nil}, \text{sc})$ satisfying the following.

- $\mathcal{P} = \{S_1, \dots, S_k\}$ is a finite, nonempty set of program checkpoints (programs, for short).
- E is a finite, nonempty set of transitions of the form (S, φ, ζ, S') , where: $S, S' \in \mathcal{P}$ are called the source and target program checkpoint, respectively; $\varphi : \overline{\mathbb{R}}^m \rightarrow \{0, 1\}$ is a predicate; and $\zeta : \overline{\mathbb{R}}^m \times \mathcal{F}_m \rightarrow [0, 1]$ is a parametric measure.
- $\text{nil} \in \mathcal{P}$ is a distinguished terminated program checkpoint, such that $(\text{nil}, 1, \text{id}, \text{nil})$ ($\text{id} = \text{identity}$) is the only transition in E with nil as source.

²With the proviso that, when $x_2 = 0$ or $|x_1|, |x_2| = +\infty$, $N(x_1, x_2, r)$ denotes an arbitrarily fixed, default probability density.

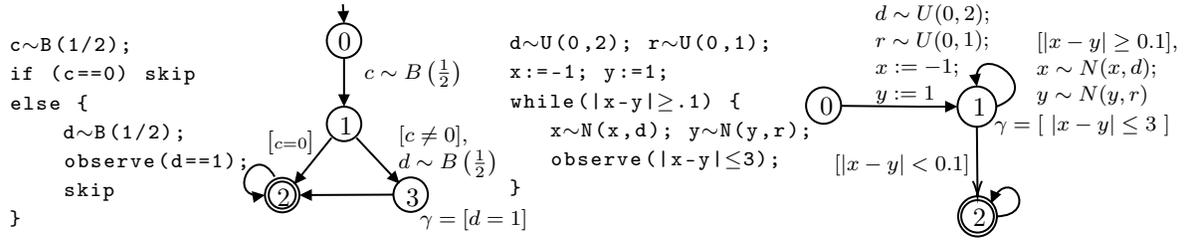


FIGURE 1. Left. The PPG of Example 2 and a corresponding pseudo-code. The nil node (2) is distinguished with a double border. Constant 1 predicates and score functions, and the identity function are not displayed in transitions. The score function γ decorates node 3, that is $\mathbf{sc}(3) = \gamma$. **Right.** The PPG for the drunk man and mouse random walk of Example 3 and a corresponding pseudo-code. The score function γ decorates node 1, that is $\mathbf{sc}(1) = \gamma$.

- \mathbf{sc} is a mapping from \mathcal{P} to the set of score functions, s.t. $\mathbf{sc}(\text{nil})$ is the constant 1.**

Additionally, denoting by E_S the set of transitions in E with S as a source checkpoint, the following consistency condition is assumed: for each $S \in \mathcal{P}$, the function $\sum_{(S, \varphi, \zeta, S') \in E_S} \varphi$ is the constant 1.

We first illustrate Definition 2 with a simple example. This will also serve to illustrate the finite approximation theorem in the next section.

Example 2. Consider the PPG in Fig. 1, left. Here we have $m = 2$ and $B(p)$ is the Bernoulli distribution with success probability p . On the left, a more conventional pseudo-code notation for the resulting program. We will not pursue a systematic formal translation from this program notation to PPGs, though.

The following example illustrates the use of scoring functions inside loops. While a bit contrived, it is close to the structure of more significant scenarios, such as the aircraft tracking example of [59], cf. Section 7.

Example 3 (Of mice and drunk men). On a street, a drunk man and a mouse perform independent random walks starting at conventional positions -1 and 1 respectively. Initially, each of them samples a standard deviation (s.d.) from a uniform distribution. Then, at each discrete time step, they independently sample their own next position from a Normal distribution centered at the current position with the s.d. chosen at the beginning. The process is stopped as soon as the man and the mouse meet, which we take to mean the distance between them is $< 1/10$.

It has been suggested that in certain urban areas a man is never more than $3m$ away from a mouse [46]. Taking this information at face value, we incorporate it into our model with the score function $\gamma := [|x - y| \leq 3]$. The resulting PPG is described in Figure 1, right (cf. also pseudo-code).

Remark 1. The definition of score function requires that γ takes values on $[0, 1]$. This restriction is necessary for the weight function to be defined on infinite traces (cf. (4.2)) be well-defined. A similar restriction is found in e.g. [26]. In practice, provided that γ is nonnegative and bounded, we can always divide by an appropriate constant³. E.g., rather than $\gamma(x_1, x_2) = N(x_1, 0.1, x_2)$, we can consider $\gamma(x_1, x_2) = N(x_1, 0.1, x_2)/N(0, 0.1, 0)$. As far as the trace semantics is concerned (Section 4), this normalization will in fact be immaterial, as

³Provided all the score functions appearing in the program are divided by the same constant, so as to avoid distorsive effects.

it will take place on both the numerator and the denominator. On the other hand, we cannot use unbounded score functions, like say, $\gamma(x_1, x_2) = N(x_1, x_2, x_2)$.

Operational semantics of PPGs. For any given PPG \mathbf{G} , we will define a Markov kernel $\kappa_{\mathbf{G}}(\cdot, \cdot)$ that describes its operational semantics. From now on, we will consider one arbitrarily fixed PPG, $\mathbf{G} = (\mathcal{P}, E, \text{nil}, \text{sc})$ and just drop the subscript \mathbf{G} from the notation. Let us also remark that the scoring function $\text{sc}(\cdot)$ will play no role in the definition of the Markov kernel — it will come into play in the trace based semantics of Section 4.

Some additional notational shorthand is in order. First, we identify \mathcal{P} with the finite set of naturals $\{0, \dots, |\mathcal{P}| - 1\}$. With this convention, we have that $\overline{\mathbb{R}}^m \times \mathcal{P} \subseteq \overline{\mathbb{R}}^{m+1}$. Henceforth, we define our state space and sigma-field as follows:

$$\Omega := \overline{\mathbb{R}}^{m+1} \quad \mathcal{F} := \text{Borel sigma-field over } \overline{\mathbb{R}}^{m+1}.$$

We keep the symbol \mathcal{F}_k for the Borel sigma-field over $\overline{\mathbb{R}}^k$, for any $k \geq 1$. For any $S \in \mathcal{P}$ and $A \in \mathcal{F}$, we let $A_S := \{v \in \overline{\mathbb{R}}^m : (v, S) \in A\}$ be the *section* of A at S . Note that $A_S \in \mathcal{F}_m$, as sections of measurable sets are measurable, see [2, Th.2.6.2, proof(1)].

Definition 3 (PPG Markov kernel). *The function $\kappa : \Omega \times \mathcal{F} \rightarrow \mathbb{R}^+$ is defined as follows, for each $\omega \in \Omega$ and $A \in \mathcal{F}$:*

$$\kappa(\omega)(A) := \begin{cases} \delta_{\omega}(A) & \text{if } \omega \notin \overline{\mathbb{R}}^m \times \mathcal{P} \\ \sum_{(S, \varphi, \zeta, S') \in E_S} \varphi(v) \cdot \zeta(v)(A_{S'}) & \text{if } \omega = (v, S) \in \overline{\mathbb{R}}^m \times \mathcal{P}. \end{cases} \quad (3.2)$$

Lemma 1. *The function κ is a Markov kernel from Ω to Ω .*

4. TRACE SEMANTICS FOR PPGS

In what follows, we fix an arbitrary PPG, $\mathbf{G} = (\mathcal{P}, E, \text{nil}, \text{sc})$ and let κ denote the induced Markov kernel, as per Definition 3. For any $t \geq 1$, we call Ω^t the set of *paths of length t*. Consider now the set of paths of infinite length, Ω^∞ , that is the set of infinite sequences $\tilde{\omega} = (\omega_1, \omega_2, \dots)$ with $\omega_i \in \Omega$. For any $\omega^t \in \Omega^t$ and $\tilde{\omega} \in \Omega^\infty$, we identify the pair $(\omega^t, \tilde{\omega})$ with the element of Ω^∞ in which the prefix ω^t is followed by $\tilde{\omega}$. For $t \geq 1$ and a measurable $B_t \subseteq \Omega^t$, we let $\mathbf{c}(B_t) := B_t \cdot \Omega^\infty \subseteq \Omega^\infty$ be the *measurable cylinder* generated by B_t . We let \mathcal{C} be the minimal sigma-field over Ω^∞ generated by all measurable cylinders. Under the same assumptions of Theorem 1 on the measure μ^1 and on the kernels K_2, K_3, \dots there exists a unique measure μ^∞ on \mathcal{C} such that for each $t \geq 1$ and each measurable cylinder $\mathbf{c}(B_t)$, it holds that $\mu^\infty(\mathbf{c}(B_t)) = \mu^t(B_t)$: see [2, Th.2.7.2], also known as the *Ionescu-Tulcea theorem*. In the definition below, we let $0 = (0, \dots, 0)$ (m times) and consider $\delta_{(0, S)}$, the Dirac's measure on Ω that concentrates all the probability mass in $(0, S)$.

Definition 4 (probability measure induced by S). *Let $S \in \mathcal{P}$. For each integer $t \geq 1$, we let μ_S^t be the probability measure over Ω^t uniquely defined by Theorem 1(a) by letting $\mu^1 = \delta_{(0, S)}$ and $K_2 = \dots = K_t = \kappa$. We let μ_S^∞ be the unique probability measure on \mathcal{C} induced by μ^1 and $K_2 = \dots = K_t = \dots = \kappa$, as determined by the Ionescu-Tulcea theorem.*

In other words, $\mu_S^t = \delta_{(0, S)} \otimes \kappa \otimes \dots \otimes \kappa$ ($t - 1$ times κ). By convention, if $t = 1$, $\mu_S^t = \delta_{(0, S)}$. The measure μ_S^∞ can be informally interpreted as the limit of the measures μ_S^t and represents the semantics of S .

Recall that the *support* of an (extended) real valued function f is the set $\text{supp}(f) := \{z : f(z) \neq 0\}$. In what follows, *we shall concentrate on nonnegative measurable functions* f to avoid unnecessary complications with the existence of integrals. General functions can be dealt with by the usual trick of decomposing f as $f = f^+ - f^-$, where $f^+ = \max(0, f)$ and $f^- = -\min(0, f)$, and then dealing separately with f^+ and f^- . Let us introduce a *combined score function* $\text{sc} : \Omega \rightarrow [0, 1]$ as follows, for each $\omega = (v, S)$:

$$\text{sc}(\omega) := \begin{cases} \text{sc}(S)(v) & \text{if } \omega = (v, S) \in \overline{\mathbb{R}}^m \times \mathcal{P} \\ 1 & \text{otherwise.} \end{cases} \quad (4.1)$$

The function $\text{sc}(\cdot)$ is extended to a *weight function* on infinite traces, $w : \Omega^\infty \rightarrow [0, 1]$ by letting⁴, for any $\tilde{\omega} = (\omega_1, \omega_2, \dots) \in \Omega^\infty$:

$$w(\tilde{\omega}) := \prod_{j \geq 1} \text{sc}(\omega_j). \quad (4.2)$$

For each $t \geq 1$, we define the weight function truncated at time t , $w_t : \Omega^t \rightarrow [0, 1]$, by $w_t(\omega^t) := \prod_{j=1}^t \text{sc}(\omega_j)$. Both w and w_t ($t \geq 1$) are measurable functions on the respective domains (see Lemma A.2). We arrive at the definition of the semantics of programs. We consider the ratio of the unnormalized semantics ($\llbracket S \rrbracket f$) to the weight of all traces, terminated or not ($\llbracket S \rrbracket w$). In the special case when the score functions represent conditioning, this choice corresponds to quotienting over the probability of *non failed* traces. In PPL, quotienting over non failed states is somewhat standard: see e.g. the discussion in [38, Section 8.3.2].

Definition 5 (trace semantics). *Let f be a nonnegative measurable function defined on Ω^∞ . We let the unnormalized semantics of S and f be $\llbracket S \rrbracket f := E_{\mu_S^\infty}[f] (= \int \mu_S^\infty(d\tilde{\omega}) f(\tilde{\omega}))$. We let*

$$\llbracket S \rrbracket f := \frac{\llbracket S \rrbracket (f \cdot w)}{\llbracket S \rrbracket w} \quad (4.3)$$

provided the denominator above is > 0 ; otherwise $\llbracket S \rrbracket f$ is undefined.

5. FINITE APPROXIMATION

The operational semantics of a probabilistic program is defined over infinite traces, due to the possibility of unbounded loops. Yet in practice, we can reason about or sample only *finite* traces. The main result of this section, Theorem 2, provides a rigorous way to approximate expectations over infinite traces by computing expectations over finite prefixes. Intuitively, the theorem says that if we truncate all traces at a fixed length t , and restrict our attention to those that have already terminated by that point, then we can compute lower and upper bounds for the expectation of f . Moreover, the bounds converge to the true value as $t \rightarrow +\infty$, if the program is guaranteed to terminate within finite time (Theorem 3)

In more detail, we are interested in $\llbracket S \rrbracket f$ in cases where the value of f is, so to speak, determined by a finite prefix of its argument: we call these functions *prefix-closed*, and will define them further below. We first have to introduce prefix-closed languages⁵, for which some notation on languages of finite and infinite words is useful. Given two words $w, w' \in \Omega^*$, we write $w \prec w'$ if w is a prefix of w' , i.e. there exists a word $w'' \in \Omega^*$ such that $ww'' = w'$; otherwise we write $w \not\prec w'$. For $L, L' \subseteq \Omega^*$, we write $L \not\prec L'$ if for all $w \in L$ and $w' \in L'$ we have $w \not\prec w'$. A sequence of languages L_0, L_1, \dots such that for each j , $L_j \subseteq \Omega^j$ (with

⁴Note that $w(\tilde{\omega})$ is well-defined because $0 \leq \text{sc}(\omega_j) \leq 1$ for each $j \geq 0$, so the sequence of partial products is nonincreasing.

⁵In the context of model checking, these languages arise as complements of Safety properties; see e.g. [5, Def.3.22].

$\Omega^0 := \{\epsilon\}$, the empty sequence) is said to be *prefix-free* if for each $i \neq j$, $L_i \not\prec L_j$. Note that if $L_0 \neq \emptyset$ then $L_j = \emptyset$ for $j \geq 1$. For the sake of uniform notation, in what follows we convene that $\omega^0 := \epsilon$ and $\mathfrak{c}(\{\epsilon\}) := \Omega^\infty$. We say $A \subseteq \Omega^\infty$ is a *prefix closed set* if there is a prefix-free sequence of languages L_0, L_1, \dots such that $A = \bigcup_{j=0}^\infty \mathfrak{c}(L_j)$; we call L_j a *j-branch* of A , and refer to L_0, L_1, \dots collectively as *branches of A*. For any $t \geq 1$, we define the following subsets of Ω^t :

$$L^{\leq t} := \bigcup_{j=0}^t L_j \cdot \Omega^{t-j}, \quad L^{> t} := \{\omega^t : \text{there is } t' > t \text{ and } \omega_{t'} \in L_{t'} \text{ s.t. } \omega^t \prec \omega^{t'}\}.$$

Informally speaking, $L^{\leq t}$ is the set of paths of length t that will become members of A however we extend them to infinite words. $L^{> t}$ is the set of paths of length t for which some infinite extensions, but not all, are in A — they are so to speak “undecided”. Of special interest is the prefix-free sequence of languages defined below.

Definition 6 (termination). *Let $\mathbb{T} := \overline{\mathbb{R}}^m \times \{\text{nil}\}$ be the set of terminated states and let \mathbb{T}^c denote its complement. We let $T_j \subseteq \Omega^j$ ($j \geq 0$) be the set of finite sequences that terminate at time j , that is: $T_0 := \emptyset$ and $T_j := (\mathbb{T}^c)^{j-1} \cdot \mathbb{T}$, for $j \geq 1$. We let $T_{\text{f}} := \bigcup_{t \geq 0} \mathfrak{c}(T_t) \subseteq \Omega^\infty$ denote the set of infinite sequences that terminate in finite time.*

Note that $\{T_j : j \geq 0\}$ forms a prefix-free sequence, that $T^{\leq t} \subseteq \Omega^t$ is the set of all paths of length t that terminate within time t , while $\mathfrak{c}(T_t) \subseteq \Omega^\infty$ is the set of infinite execution paths with termination at time t . The next definition introduces prefix-closed functions. These are functions f with a prefix-free support, condition (a), additionally satisfying two extra conditions. Condition (b) just states that the value of f on its support is determined by a finite prefix of the input sequence. Condition (c), \mathbb{T} -respectfulness, means that a trace that terminates at time j ($\omega^j \in T_j$) cannot lead to $\text{supp}(f)$ at a later time ($\omega^j \notin L^{> j}$). This is a consistency condition, formalizing that the value of f does not depend on, so to speak, what happens *after* termination.

Definition 7 (prefix-closed function). *Let $f : \Omega^\infty \rightarrow \overline{\mathbb{R}}^+$ be a nonnegative measurable function and (L_0, L_1, \dots) be a prefix-closed sequence. We say f is a prefix-closed function with branches L_0, L_1, \dots if the following conditions are satisfied.*

- (a) $\text{supp}(f)$ is prefix-free with branches L_j ($j \geq 0$).
- (b) for each $j \geq 0$ and $\omega^j \in L_j$, f is constant on $\mathfrak{c}(\{\omega^j\})$.
- (c) $\text{supp}(f)$ is \mathbb{T} -respectful: for each $j \geq 0$, $L^{> j} \cap T_j = \emptyset$.

Note that there may be different prefix-free sequences w.r.t. which f is prefix-closed.

Example 4. *The indicator function $1_{T_{\text{f}}}$ is clearly a prefix closed, measurable function with $\text{supp}(1_{T_{\text{f}}}) = T_{\text{f}}$ and branches $L_j = T_j$. For more interesting examples, consider the PPG in Example 3 and the functions f_1 , that returns the time the process terminates, and f_2 that returns the value of d at termination. Here $\text{supp}(f_1) = T_{\text{f}}$ has branches $L_j = T_j$ ($j \geq 0$), instead $\text{supp}(f_2) = \{\tilde{\omega} \in T_{\text{f}} : \text{the first terminated state } \omega \text{ in } \tilde{\omega}, \text{ if it exists, has } \omega(1) = d \in (0, 2]\}$, and $L_0 = \emptyset$, $L_j = (\mathbb{T}^c)^{j-1} \cdot (\mathbb{T} \cap ((0, 2] \times \overline{\mathbb{R}}^d))$ ($j \geq 1$).*

We will now study how to consistently approximate infinite computations (μ_S^∞ semantics) with finite ones (μ_S^t semantics). This will lead to the main result of this section (Theorem 2). As a first step, let us introduce an appropriate notion of finite approximation for functions f defined on the infinite product space Ω^∞ . Fix an arbitrary element $\star \in \Omega$. For each $f : \Omega^\infty \rightarrow \overline{\mathbb{R}}^+$ and $t \geq 1$, let us define the function $f_t : \Omega^t \rightarrow \overline{\mathbb{R}}^+$ by $f_t(\omega^t) := f(\omega^t, \star^\infty)$. The intuition here is that, for a prefix-closed function f , the function f_t approximates correctly f

for all finite paths in the L_j -branches of f , for $j \leq t$. Consider for instance the function $f = f_1$ in Example 4. On $L^{\leq t}$, the approximation f_t gives the correct value w.r.t. f in a precise sense: $f_t(\omega^t) = f(\omega^t, \star^\infty) = f(\omega^t, \tilde{\omega}')$ whatever \star and $\tilde{\omega}'$. On the other hand, for finite paths $\omega^t \in L^{> t}$, f_t may not approximate f correctly: we may have $f_t(\omega^t) = f(\omega^t, \star^\infty) \neq f(\omega^t, \tilde{\omega}')$ depending on the specific \star and $\tilde{\omega}'$. The catch is, as t grows large, the set $L^{> t}$ will become thinner and thinner — at least under reasonable assumptions on the measure μ_S^∞ .

It is not difficult to check that, for any t , f_t is measurable over Ω^t (Lemma A.2 in the Appendix). The next result shows how to approximate $\llbracket S \rrbracket f$ with quantities defined *only in terms of f_t, w_t and μ_S^t* , which is the basis for the sampling-based inference algorithm in the next section. Formally, for $t \geq 1$ and a measurable function $h : \Omega^t \rightarrow \mathbb{R}^+$, we let

$$[S]^t h := \mathbb{E}_{\mu_S^t}[h] (= \int \mu_S^t(d\omega^t)h(\omega^t)).$$

The proof of Theorem 2 (Appendix A) will follow by applying the following lemma to the numerators and denominators of the expressions involved in (5.2). The intuition is as follows. Consider a prefix closed function f with branches L_0, L_1, \dots . Consider the definition of $\llbracket S \rrbracket f$, Def. 5. For any time t , it is not difficult to see that $\mathfrak{c}(L^{\leq t} \cap T^{\leq t}) \subseteq \text{supp}(f) \subseteq \mathfrak{c}(L^{\leq t} \cap T^{\leq t}) \cup (\mathfrak{c}(T^{\leq t}))^c$ (the last inclusion involves T-respectfulness). Since f_t approximates correctly f on $L^{\leq t}$, one sees that the first inclusion leads to the lower bound $[S]^t f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}} \cdot w_t \leq [S](f \cdot w)$. As for the upper bound, the intuition is that, over $(\mathfrak{c}(T^{\leq t}))^c$, f is upper-bounded by M .

Lemma 2. *Let $t \geq 1$ and let $f \leq M$ be a prefix-closed function with branches L_j ($j \geq 0$):*

$$[S]^t f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}} \cdot w_t \leq [S]f \cdot w \leq [S]^t f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}} \cdot w_t + M \cdot [S]^t(1 - 1_{T^{\leq t}}) \cdot w_t. \quad (5.1)$$

In the formulation of the theorem's upper bound, we find it convenient to introduce a 'correction factor' $\alpha_t \geq 1$, the ratio of the weight of *all* traces to *terminated* traces at time t .

Theorem 2 (finite approximation). *Consider $S \in \mathcal{P}$ and $t \geq 1$ such that $[S]^t 1_{T^{\leq t}} \cdot w_t > 0$. Then for any prefix-closed function f with branches L_0, L_1, \dots we have that $\llbracket S \rrbracket f$ is well defined. Moreover, given an upper bound $f \leq M$ ($M \in \mathbb{R}^+$), for each t large enough and $\alpha_t := \frac{[S]^t w_t}{[S]^t 1_{T^{\leq t}} \cdot w_t}$ we have:*

$$\frac{[S]^t f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}} \cdot w_t}{[S]^t w_t} \leq \llbracket S \rrbracket f \leq \frac{[S]^t f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}} \cdot w_t}{[S]^t w_t} \alpha_t + M \cdot (\alpha_t - 1). \quad (5.2)$$

When f is an indicator function, $f = 1_A$, we can of course take $M = 1$ in the theorem above. We first illustrate the above result with a simple example.

Example 5. *Consider the PPG of Example 2 (Fig. 1, left). We ask what is the expected value of c upon termination of this program. Formally, we consider the program checkpoint $S = 0$, and the function f on traces that returns the value of c on the first terminated state, if any, and 0 elsewhere. This f is clearly prefix-closed with branches $L_j \subseteq T_j$. We apply Theorem 2 to $\llbracket S \rrbracket f$. Fixing the time $t = 4$, we can calculate easily the quantities involved in the approximation of $\llbracket S \rrbracket f$ in (5.2). In doing so, we must consider the finitely many paths of length t of nonzero probability and weight (there are only two of them), their weights and the value of c on their final state when terminated ⁶.*

$$\begin{aligned} [S]^t f_t \cdot 1_{T^{\leq t}} \cdot w_t &= 0 \cdot \frac{1}{2} + 1 \cdot \frac{1}{2} \cdot \frac{1}{2} = \frac{1}{4} & [S]^t w_t &= \frac{1}{2} + \frac{1}{2} \cdot \frac{1}{2} = \frac{3}{4} \\ [S]^t 1_{T^{\leq t}} \cdot w_t &= \frac{1}{2} + \frac{1}{2} \cdot \frac{1}{2} = \frac{3}{4} & \alpha_t &= 1. \end{aligned}$$

⁶Here, we also use the fact that $f_t \cdot 1_{T^{\leq t}} = f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}}$, a consequence of $L_j \subseteq T_j$ for all j s.

Then, with $M = 1$, the lower and upper bounds in (5.2) coincide and yield $\llbracket S \rrbracket f = \frac{1}{3}$. If we remove conditioning on node 4, then all the paths of length t have weight 1, and a similar calculation yields $\llbracket S \rrbracket f = \frac{1}{2}$.

In more complicated cases, we may not be able to calculate exactly the quantities involved in (5.2), but only to estimate them via sampling. To this purpose, we will introduce Feynman-Kac models and the Particle Filtering algorithm in the next section. For now, we content ourselves with the following example.

Example 6. Consider the PPG of Example 3 and $f = f_2$ from Example 4. Take $S = 0$. Then $\llbracket S \rrbracket f$ is the posterior expectation of the value of d , the drunk man's standard deviation. We can compute upper and lower bounds on $\llbracket S \rrbracket f$ using (5.2). Let us fix $t = 60$. By sampling from μ_S^t , we can compute separately the following estimates for each of the expected values involved in (5.2): $[S]^t f_t \cdot \mathbf{1}_{L \leq t \cap T \leq t} \cdot w_t = 0.396$, $[S]^t w_t = 0.987$ and $\alpha_t = 1.497$. Combining these estimates as in (5.2), with $M = 2$, we get the bounds: $0.402 \leq \llbracket S \rrbracket f \leq 1.596$. This relatively large interval can be narrowed down by considering higher values of t , hence α_t closer to 1. A more efficient and accurate method to compute the bounds in (5.2) will be introduced in Section 6, the Particle Filtering algorithm.

The theorem below confirms that the bounds established above are asymptotically tight, at least under the assumption that the program $S \in \mathcal{P}$ terminates with probability 1. In this case, in fact, the probability mass outside $T^{\leq t}$ tends to 0, which leads the lower and the upper bound in (5.2) to coincide. Moreover, we get a simpler formula in the special case when termination is guaranteed to happen within a fixed time limit; for instance, in the case of acyclic⁷ PPGs.

Theorem 3 (tightness). Assume the same hypotheses as in Theorem 2. Further assume that $\mu_S^\infty(T_f) = 1$. Then both the lower and the upper bounds in (5.2) tend to $\llbracket S \rrbracket f$ as $t \rightarrow +\infty$. In particular, if for some $t \geq 1$ we have $[S]^t \mathbf{1}_{T \leq t} = 1$, then

$$\llbracket S \rrbracket f = \frac{[S]^t f_t \cdot w_t}{[S]^t w_t}. \quad (5.3)$$

Example 7. For the PPG of Example 2 one has $\mu_S^\infty(T_f) = 1$. As already seen in Example 2, lower and upper bounds coincide for $t \geq 4$.

A practically relevant class of closed prefix functions are those where the result $f(\tilde{\omega})$ only depends on computing a function h , defined on Ω , on the first terminated state, if any, of the sequence $\tilde{\omega}$. This way h is *lifted* to Ω^∞ . This case covers all the examples seen so far. We formally introduce lifting below. Recall that for $t \geq 1$, $T_t = (T^c)^{t-1} \cdot T$.

Definition 8 (lifting). Let $h : \Omega \rightarrow \overline{\mathbb{R}}^+$ a nonnegative measurable function such that $\text{supp}(h) \subseteq T$. The lifting of h is the measurable function $\check{h} : \Omega^\infty \rightarrow \overline{\mathbb{R}}^+$ defined as follows for each $\tilde{\omega} = (\omega_1, \omega_2, \dots)$: $\check{h}(\tilde{\omega}) := \sum_{t \geq 1} \mathbf{1}_{c(T_t)}(\tilde{\omega}) \cdot h(\omega_t)$.

Clearly, any \check{h} is prefix closed with branches $L_0 = \emptyset$ and $L_j = (T^c)^{j-1} \cdot \text{supp}(h) \subseteq T_j$ for $j \geq 1$. In particular, $\text{supp}(\check{h}) \subseteq T_f$.

Example 8. The indicator function for the set of paths that eventually terminate, $\check{h} = \mathbf{1}_{T_f}$, is clearly the lifting of $h = \mathbf{1}_T$. For more interesting examples, consider Example 4. The function

⁷Or, more accurately, PPGs where the only loop is the self-loop on the nil state.

f_1 is not a lifting of any function on Ω , as it must count how many states are traversed up to the first one in \top . However, one can modify the program of Example 3 to insert a new counter variable j that provides this information, and return the value of j at termination. The function f_2 is the lifting of the function $h(d, r, x, y, z) = d \cdot [0 \leq d \leq 2] \cdot [z = \text{nil}]$.

6. FEYNMAN-KAC MODELS

In the field of Sequential Monte Carlo methods, Feynman-Kac (FK) models [28, Ch.9] are characterized by the use of *potential* functions. A potential in a Feynman-Kac model is a function that assigns a weight $G_t(x)$ to a *particle* (instance of a random process) in state x at time t . This weight represents how plausible or fit x is at time t based on some observable or conditioning. In other words, G_t modifies the *importance* of particles as the system evolves. For instance, in a model for tracking an object, the potential function could depend on the distance between the predicted particle position and the actual observed position. Particles closer to the observed position get higher weights.

FK models and probabilistic program semantics. As seen, our semantics incorporates conditioning via score functions applied at program checkpoints, and aggregates their effect into a global weight w over traces. This makes it possible to interpret program semantics as a reweighted expectation (Definition 5). Here we will show that this expectation can be approximated reliably using the Feynman-Kac framework and particle filtering. We first introduce FK models in a general context. Our formulation follows closely [28, Ch.9]. Throughout this and the next section, we let $t \geq 1$ be an arbitrary fixed integer.

Definition 9 (Feynman-Kac models). *A Feynman-Kac (FK) model is a tuple $\text{FK} = (\mathcal{X}, t, \mu^1, \{K_i\}_{i=2}^t, \{G_i\}_{i=1}^t)$, where $\mathcal{X} = \mathbb{R}^\ell$ for some $\ell \geq 1$, μ^1 is a probability measure on \mathcal{X} and, for $i = 2, \dots, t$: K_i is a Markov kernel from \mathcal{X} to \mathcal{X} , and $G_i : \mathcal{X} \rightarrow \mathbb{R}^+$ is a measurable function.*

Let μ^t denote the unique product measure on \mathcal{X}^t induced by μ_1, K_2, \dots, K_t as per Theorem 1. Let $G := \prod_{i=1}^t G_i$. Provided $0 < \mathbb{E}_{\mu^t}[G] < +\infty$, the Feynman-Kac measure induced by FK is defined by the following, for every measurable $A \subseteq \mathcal{X}^t$:

$$\phi_{\text{FK}}(A) := \frac{\mathbb{E}_{\mu^t}[1_A \cdot G]}{\mathbb{E}_{\mu^t}[G]}. \quad (6.1)$$

We will refer to G in the above definition as the *global potential*. Equality (6.1) easily generalizes to expectations taken according to ϕ_{FK} . That is, for any measurable nonnegative function g on \mathcal{X}^t , we can easily show that:

$$\mathbb{E}_{\phi_{\text{FK}}}[g] = \frac{\mathbb{E}_{\mu^t}[g \cdot G]}{\mathbb{E}_{\mu^t}[G]}. \quad (6.2)$$

In what follows, we will suppress the subscript FK from ϕ_{FK} in the notation, when no confusion arises. Comparing (6.2) against the definition (4.3) suggests that the global potential G should play in FK models a role analogous to the weight function w in probabilistic programs. Note however that there is a major technical difference between the two, because FK models are only defined for a finite time horizon model given by t . A reconciliation between the two is possible thanks to the finite approximation theorem seen in the last section; this will be elaborated further below (see Theorem 4).

We will be particularly interested in the t -th marginal of ϕ , that is the probability measure on \mathcal{X} defined as ($A \subseteq \mathcal{X}$ measurable):

$$\phi_t(A) := \phi(\mathcal{X}^{t-1} \times A) = \mathbb{E}_\phi[1_{\mathcal{X}^{t-1} \times A}]. \quad (6.3)$$

The measure ϕ_t is called *filtering* distribution (at time t), and can be effectively computed via the Particle Filtering algorithm described in the next subsection. Now let $\mathbf{G} = (\mathcal{P}, E, \text{nil}, \text{sc})$ be an arbitrary fixed PPG. Comparing (6.2) against e.g. the lower bound in (5.2) suggests considering the following FK model associated with \mathbf{G} and a checkpoint S .

Definition 10 (FK $_S$ model). *Let $t \geq 1$ be an integer and S a program checkpoint of \mathbf{G} . We define FK $_S$ as the FK model where: $\mathcal{X} = \Omega$, $\mu^1 = \delta_{(0,S)}$, $K_i = \kappa$ ($i = 2, \dots, t$) and $G_i = \text{sc}$ ($i = 1, \dots, t$). We let ϕ_S denote the measure on Ω^t induced by FK $_S$.*

We now restrict our attention to functions f that are the lifting of a nonnegative h defined on Ω . Let $\phi_{S,t}$ denote the filtering distribution of ϕ_S at time t obtained by (6.3). In the following theorem we express the bounds in (5.2) in terms of the measure $\phi_{S,t}$. The whole point and interest of this result is that the bounds are expressed directly as expectations; these are moreover taken w.r.t. a 1-dimensional filtering distribution ($\phi_{S,t}$), rather than a t -dimensional one (μ_S^t). Importantly, there are well-known algorithms to estimate expectations under a filtering distribution, as we will see in the next subsection.

Theorem 4 (filtering distributions and lifted functions). *Under the same assumptions of Theorem 2, further assume that f is the lifting of h . Then $\alpha_t = \mathbb{E}_{\phi_{S,t}}[1_\top]^{-1}$ and*

$$\beta_L := \mathbb{E}_{\phi_{S,t}}[h] \leq \llbracket S \rrbracket f \leq \mathbb{E}_{\phi_{S,t}}[h] \cdot \alpha_t + M \cdot (\alpha_t - 1) =: \beta_U. \quad (6.4)$$

Example 9. *Consider again the PPG of Example 2. We can re-compute $\llbracket S \rrbracket f$ relying on Theorem 4. Fix $t = 4$. We first compute the filtering distribution ϕ_t on $\mathcal{X} = \Omega = \overline{\mathbb{R}}^3$ relying on its definition (6.3). Similarly to what we did in Example 5, we consider the nonzero-weight, nonzero-probability traces of length four. Then we project onto the final (fourth) state, and compute the weights of the resulting triples (c, d, S) , then normalize. There are only two triples (c, d, S) of nonzero probability:*

$$\phi_t(0, 0, 2) = \frac{2}{3} \qquad \phi_t(1, 1, 2) = \frac{1}{3}.$$

The function f considered in Example 5 is the lifting of the function $h(c, d, S) = c \cdot [S = 2]$ defined on $\mathcal{X} = \overline{\mathbb{R}}^3$. We apply Theorem 4 and get $\beta_L = \mathbb{E}_{\phi_t}[h] = \frac{1}{3} \leq \llbracket S \rrbracket f$. Moreover $\mathbb{E}_{\phi_t}[1_\top] = 1$, hence $\alpha_t = 1$ according to Theorem 4. Hence $\beta_L = \beta_U = \llbracket S \rrbracket f = \frac{1}{3}$. This agrees with examples 5 and 7.

We can apply the above theorem to the functions described in Example 4 and to other computationally challenging cases: we will do so in Section 7, after introducing in the next section the Particle Filtering algorithm.

The Particle Filtering algorithm. From a computational point of view, our interest in FK models lies in the fact that they allow for a simple, unified presentation of a class of efficient inference algorithms, known as *Particle Filtering (PF)* [28, 47, 58]. For the sake of presentation, we only introduce here the basic version, *Bootstrap PF*, following closely⁸ [28, Ch.11]. Fix a generic FK model, $\text{FK} = (\mathcal{X}, t, \mu^1, \{K_i\}_{i=2}^t, \{G_i\}_{i=1}^t)$. Fix $N \geq 1$, the number of *particles*, that is instances of the random process represented by

⁸Additional details in Appendix B.

Algorithm 1 A generic PF algorithm

Input: FK = $(\mathcal{X}, t, \mu^1, \{K_k\}_{k=2}^t, \{G_k\}_{k=1}^t)$, a FK model; $N \geq 1$, no. of particles.
Output: $X_t^{1:N} \in \mathcal{X}^N, W_t^{1:N} \in \mathbb{R}^{+N}$.

1:	$X_1^{(j)} \sim \mu^1$	▷ state initialisation
2:	$W_1^{(j)} := G_1(X_1^{(j)})$	▷ weight initialisation
3:	for $k = 2, \dots, t$ do	
4:	$r_{1:N} \sim R(W_{k-1}^{1:N})$	▷ resampling
5:	$X_k^{(j)} \sim K_k(X_{k-1}^{(r_j)})$	▷ state update
6:	$W_k^{(j)} := G_k(X_k^{(j)})$	▷ weight update
7:	end for	
8:	return (X_t, W_t)	

the K_i 's, we want to simulate. Let $W = W^{1:N} = (W^{(1)}, \dots, W^{(N)})$ be a tuple of N real nonnegative random variables, the *weights*. Denote by \widehat{W} the normalized version of W , that is $\widehat{W}^{(i)} = W^{(i)} / (\sum_{j=1}^N W^{(j)})$. A *resampling scheme* for (N, W) is a N -tuple of random variables $R = (R_1, \dots, R_N)$ taking values on $1..N$ and depending on W , such that, for each $1 \leq i \leq N$, one has: $\mathbb{E}[\sum_{j=1}^N 1_{R^{(j)}=i} | W] = N \cdot \widehat{W}^{(i)}$. In other words, each index $i \in 1..N$ on average is selected in R a number of times proportional to its weight in W . We shall write $R(W)$ to indicate that R depends on a given weight vector W . Various resampling schemes have been proposed in the literature, among which the simplest is perhaps *multinomial resampling*; see e.g. [28, Ch.9] and references therein. Algorithm 1 presents a generic PF algorithm. Resampling here takes place at step 4: its purpose is to give more importance to particles with higher weight, when extracting the next generation of N particles, while discarding particles with lower weight.

The justification and usefulness of this algorithm is that, under mild assumptions [28], for any measurable function h defined on \mathcal{X} , expectation under ϕ_t , the filtering distribution on \mathcal{X} at time t , in the limit can be expressed a weighted sum with weights $\widehat{W}_t^{(j)}$:

$$\sum_{j=1}^N \widehat{W}_t^{(j)} \cdot h(X_t^{(j)}) \longrightarrow \mathbb{E}_{\phi_t}[h] \quad \text{a.s. as } N \longrightarrow +\infty. \quad (6.5)$$

The practical implication here is that we can estimate quite effectively the expectations involved in (6.4), for $\phi_t = \phi_{S,t}$, as weighted sums like in (6.5). Note that in the above consistency statement t is held fixed — it is one of the parameter of the FK model — while the number of particles N tends to $+\infty$.

7. IMPLEMENTATION AND EXPERIMENTAL VALIDATION

7.1. Implementation. The PPG model is naturally amenable to a vectorized implementation of PF that leverages the fine-grained, SIMD parallelism existing at the level of particles. At every iteration, the state of the N particles, $\omega^N = (\omega_1, \dots, \omega_N)$ with $\omega_i = (v_i, z_i) \in \overline{\mathbb{R}}^{m+1}$, will be stored using a pair of arrays (V, Z) of shape $N \times m$ and $N \times 1$, respectively. The weight vector is stored using another array W of shape $N \times 1$. We rely on vectorization of operations: for a function $f : \overline{\mathbb{R}}^k \rightarrow \overline{\mathbb{R}}$ and a $N \times k$ array U , $f(U)$ will denote the $N \times 1$ array obtained by applying f to each row of U . In particular, we denote by $(Z = s)$ (for

Algorithm 2 VPF, a Vectorized PF algorithm for PPGs.

Input: $\mathbf{G} = (\mathcal{P}, E, \text{nil}, \mathbf{sc})$, a PPG; $S \in \mathcal{P}$, initial pr. checkpoint; $t \geq 1$, time horizon; $N \geq 1$, no. of particles.

Output: $V \in \overline{\mathbb{R}}^{m \times N}$, $Z, W \in \overline{\mathbb{R}}^{1 \times N}$.

```

1:  $V := S$  ;  $Z := S$                                 ▷ state initialisation
2:  $W := \gamma_S(Z)$                                     ▷ weight initialisation
3: for  $t - 1$  times do
4:    $(V, Z) := \text{Resampling}((V, Z), W)$                 ▷ resampling
5:   for  $(s, \varphi, \zeta, s') \in E$  do
6:      $M_{s,\varphi} := \varphi(V) * (Z = s)$                 ▷ mask computation
7:   end for
8:    $V \sim \sum_{(s,\varphi,\zeta,s') \in E} \zeta(V) * M_{s,\varphi}$  ;  $Z := \sum_{(s,\varphi,\zeta,s') \in E} s' \cdot M_{s,\varphi}$     ▷ state update
9:    $W := \sum_{s \in \mathcal{P}} \gamma_s(V) * (Z = s)$             ▷ weight update
10: end for
11: return  $(V, Z, W)$ 

```

any $s \in \mathbb{N}$) the $N \times 1$ array obtained applying element-wise the indicator function $1_{\{s\}}$ to Z element-wise, and by $\varphi(V)$ the $N \times 1$ array obtained by applying the predicate φ to V to the row-wise. For U a $N \times k$ array and W a $N \times 1$ array, $U * W$ denotes the $N \times k$ array obtained by multiplying the j th row of U by the j th element of W , for $j = 1, \dots, N$: when W is a 0/1 vector, this is an instance of *boolean masking*. Abstracting the vectorization primitives of modern CPUs and programming languages, we model the assignments of a vector to an array variable as a single instruction, written $U := Z$. The usual rules for broadcasting scalars to vectors apply, so e.g. $V := S$ for $S \in \overline{\mathbb{R}}$ means filling V with S . Likewise, for ζ a parametric distribution, $U \sim \zeta(V)$ means sampling N times independently from $\zeta(v_1), \dots, \zeta(v_N)$, and assigning the resulting matrix to U : this too counts as a single instruction.

Based on the above idealized model of vectorized computation, we present VPF, a vectorized version of the PF algorithm for PPGs, as Algorithm 2. Here it is assumed that $\mathcal{P} \subseteq \mathbb{N}$, while $\mathbf{sc}(s) = \gamma_s$. On line 4, $\text{Resampling}(\cdot)$ denotes the result of applying a generic resampling algorithm based on weights W to the current particles' state, represented by the pair of vectors (V, Z) . With respect to the generic PF Algorithm 1, here in the returned output, (V, Z) corresponds to X_t and W to W_t . Note that there are no loops where the number of iterations depends on N ; the **for** loop in lines 5–7 only scans the transitions set E , whose size is independent of N . Line 8 is just a vectorized implementation of sampling from the Markov kernel function in (6.1). Line 9 is a vectorized implementation of the combined score function (4.1). In the actual TensorFlow implementation, the sums in lines 8 and 9 are encoded via boolean masking and vectorized operations.

Example 10. Consider the PPG of Example 3 and $f = f_2$ from Example 4. Take $S = 0$. Then $\llbracket S \rrbracket_f$ is the posterior expectation of the value of d , the drunk man's standard deviation. We compute upper and lower bounds on $\llbracket S \rrbracket_f$, as defined in Theorem 4, applying Algorithm 2. Let us fix $t = 60$ and $N = 10^4$ particles. Under the filtering distribution $\phi_{S,t}$, we get $E_{\phi_{S,t}}[h] = 0.768, \alpha_t = 1.029$. Combining these estimates as in (6.4), with $M = 2$, we obtain the bounds $0.768 \leq \llbracket S \rrbracket_f \leq 0.847$. The value $\alpha_t = 1.029 \approx 1$ indicates that nearly all particles have terminated by time $t = 60$ under $\phi_{S,t}$.

7.2. Experimental validation. We illustrate some experimental results obtained with a proof-of-concept TensorFlow-based [1] implementation of Algorithm 2. We still refer to this implementation as VPF. We have considered a number of challenging probabilistic programs that feature conditioning inside loops. For all these programs, we will estimate $\llbracket S \rrbracket f$, for given functions f , relying on the bounds provided by Theorem 4 in terms of expectations w.r.t. filtering distributions. Such expectations will be estimated via VPF. We also compare VPF with two state-of-the-art PPLs, webPPL [33] and CorePPL [44]. webPPL is a popular PPL supporting several inference algorithms, including SMC, where resampling is handled via continuation passing. We have chosen to consider CorePPL by Lunden et al. as it supports a very efficient implementation of PF: in [44], a comparison of CorePPL with webPPL, Pyro [12] and other PPLs in terms of performance shows the superiority of CorePPL SMC-based inference across a number of benchmarks. CorePPL’s implementation is based on a compilation into an intermediate format, conceptually similar to our PPGs.

Models. For our experiments we have considered the following programs: *Aircraft tracking* (AT, [59]), *Drunk man and mouse* (DMM, Example 3), *Hare and tortoise* (HT, e.g. [4]), *Bounded retransmission protocol* (BRP, [40]), *Non-i.i.d. loops* (NIID, e.g. [40]), the *ZeroConf* protocol (ZC, [9]), and two variations of *Random Walks*, RW1 ([20], Example 2) and RW2 in the following. In particular, AT is a model where a single aircraft is tracked in a 2D space using noisy measurements from six radars. HT simulates a race between a hare and a tortoise on a discrete line. BRP models a scenario where multiple packets are transmitted over a lossy channel. NIID describes a process that keeps tossing two fair coins until both show tails. ZC is an idealized version of the network connection protocol by the same name. RW1, RW2 are random walks with Gaussian steps. The pseudo-code of these models is reported in Appendix D. These programs feature conditioning/scoring inside loops. In particular, DMM, HT and NIID feature unbounded loops: for these three programs, in the case of VPF we have truncated the execution after $k = 1000, 100, 100$ iterations, respectively, and set the time parameter t of Theorem 4 accordingly, which allows us to deduce bounds on the value of $\llbracket S \rrbracket f$. For the other tools, we just consider the truncated estimate returned at the end of k iterations. AT, BRP, ZC, RW1 and RW2 feature bounded loops, but are nevertheless quite challenging. In particular, AT features multiple conditioning inside a for-loop, sampling from a mix of continuous and discrete distributions, and noisy observations. Below, we discuss the obtained experimental results in terms of accuracy and performance. A description of these programs, together with further details on the experimental set up, can be found in Appendix C; code available from [21]. Table 1 summarizes the obtained experimental results, which we comment in the following.

Accuracy. We have compared VPF, CorePPL and webPPL across the above mentioned examples for different values of N , the number of particles (details in Table 1). At least for $N \geq 10^5$, the tools tend generally to return very similar estimates of the expected value, which we take as an empirical evidence of accuracy. Additional insight into accuracy is obtained by directly comparing the results of VPF with those of webPPL-rejection (when available), which is an exact inference algorithm: the expected values estimated by webPPL-rejection are consistently in line to those of VPF. We have also considered Effective Sample Size (ESS), a measure of diversity of the sample, the higher the better [30]. In terms of ESS, the difference across the tools is significant: with one exception (program RW1), VPF yields ESS

	AT			DMM			HT			BRP			NIID		
	VPF	CorePPL	webPPL-smc	VPF	CorePPL	webPPL-smc	VPF	CorePPL	webPPL	VPF	CorePPL	webPPL-smc	VPF	CorePPL	webPPL-smc
$N = 10^3$	time	0.009	0.014	0.100	0.050	0.474	0.274	0.015	0.152	0.021	0.155	0.061	0.240	0.010	0.061
	EV	6.805	6.955	6.696	0.501	0.427	32.584	33.683	32.368	0.018	0.023	3.473	3.594	2.694	3.473
	ESS	1000	1000	989	726.9	97.3	955.0	758.9	951.1	1000	1000	974.5	1000	846.6	726.9
$N = 10^4$	time	0.131	0.194	3.842	0.988	7.190	0.290	0.180	3.839	0.309	1.328	0.490	3.323	0.058	0.490
	EV	6.817	6.967	6.760	0.498	0.481	32.725	33.474	32.702	0.029	0.024	3.364	3.364	2.766	3.417
	ESS	10^4	10^4	9975	9984.5	69.417	9445.9	7692.9	9476.2	10^4	10^4	9745.8	10^4	8555.6	7560.5
$N = 10^5$	time	0.354	2.252	29.936	2.268	29.936	0.379	4.225	361.792	0.797	5.010	15.038	0.445	1.083	92.419
	EV	6.818	6.970	6.970	0.507	0.507	33.128	33.545	32.560	0.024	0.026	3.467	2.772	3.430	
	ESS	10^5	$9.9e10^5$	$7.6e10^4$	$\approx 10^6$	$7.6e10^4$	$\approx 10^6$	10^5	10^5	10^5	10^5	$9.7e10^4$	10^5	$8.5e10^4$	$7.6e10^4$
$N = 10^6$	time	2.286	26.481	-	38.977	-	3.749	49.493	-	10.155	58.448	-	2.916	14.323	-
	EV	6.834	6.980	-	33.432	33.606	$\approx 10^6$	$7.7e10^5$	-	0.024	0.025	-	3.413	2.774	-
	ESS	10^6	$9.9e10^5$	-	$\approx 10^6$	$7.7e10^5$	-	10^6	-	10^6	10^6	-	10^6	$8.5e10^5$	-
webPPL-rej	-	-	-	0.494	-	-	-	32.683	-	-	-	-	-	-	3.414

	RW1			ZC-1			ZC-2			RW2-1			RW2-2		
	VPF	CorePPL	webPPL	VPF	CorePPL	webPPL	VPF	CorePPL	webPPL	VPF	CorePPL	webPPL	VPF	CorePPL	webPPL
$N = 10^3$	time	0.192	0.009	0.045	0.206	0.018	0.016	0.231	0.024	0.232	0.232	0.232	0.232	0.021	0.187
	EV	0.323	0.324	0.250	0.514	0.477	0.483	1.046	0.642	0.912	0.677	0.750	0.750	0.750	1.082
	ESS	537.0	1000	46.739	1000	1000	245.2	992.0	780.0	3.043	997.0	3.043	997.0	997.0	133.9
$N = 10^4$	time	0.238	0.031	0.269	0.349	0.068	0.029	0.255	0.207	0.186	0.186	1.066	0.271	0.275	2.081
	EV	0.334	0.328	0.336	0.242	0.129	0.478	1.367	0.856	1.367	0.856	0.929	0.929	1.083	
	ESS	5163.0	10000	562.795	10000	10000	4263.0	10000	2446.8	9967.0	7529.0	4026.6	9701.0	9350.9	582.5
$N = 10^5$	time	0.436	0.260	7.956	0.479	0.358	0.243	1.673	1.673	0.405	3.003	181.802	0.240	3.887	149.831
	EV	0.337	0.328	0.332	0.174	0.131	0.378	0.493	0.479	1.009	0.998	0.982	1.040	0.982	1.037
	ESS	$5.1e10^4$	10^5	$5.7e10^4$	10^5	$4.2e10^4$	10^5	$2.4e10^4$	$\approx 10^5$	$7.3e10^4$	$4.7e10^4$	$\approx 10^5$	$9.5e10^4$	$2.0e10^3$	-
$N = 10^6$	time	3.422	2.569	-	3.928	5.790	2.485	35.271	-	3.742	35.271	-	3.595	42.134	-
	EV	0.329	0.329	-	0.245	0.130	0.480	1.011	1.001	1.011	1.001	-	1.023	1.002	-
	ESS	$5.2e10^5$	10^6	-	10^6	10^6	10^6	$\approx 10^6$	$\approx 10^6$	$\approx 10^6$	$\approx 10^6$	-	$\approx 10^6$	$9.4e10^5$	-
webPPL-rej	0.332	-	-	0.235	-	-	0.479	-	-	-	-	-	-	-	1.061

TABLE 1. Execution time (*time*) in seconds, estimated expected value (*EV*) and effective sample size (*ESS*) := $(\sum_{i=1}^N W_i)^2 / (\sum_{i=1}^N W_i^2)$; the higher the better, see e.g. [30]) as the number of particles (N) increases, for VPF, CorePPL and webPPL, when applied on Aircraft tracking (AT), Drunk man and mouse (DMM), Hare and tortoise (HT), Bounded retransmission protocol (BRP), Non-i.i.d. loops (NIID), ZeroConf (ZC.1, ZC.2) and Random Walks (RW1 and RW2.1, RW2.2). For VPF, with reference to Theorem 4: for the bounded loops AT, BRP, RW1, RW2.1, RW2.2, ZC.1 and ZC.2, we have $EV = \beta_L = \beta_U$ (as $\alpha_t = 1$); for HT and NIID, we only provide β_L , as β_U is vacuous ($M = +\infty$). For DMM we give the midpoint of the interval $[\beta_L, \beta_U] \pm$ its half-width. Best results for *time* and *ESS* for each example and value of N are marked in **boldface**. Everywhere, ‘-’ means no result due to out-of-memory or timeout (500s). The results for DDM, especially for smaller values of N , exhibit a significant empirical variance: those reported in the table are obtained by averaging over 10 runs of each algorithm. Generally, there is an agreement across the tools about the estimates *EV*: an exception is NIID, where CorePPL returns values significantly different from the other tools’ and from the exact value $\frac{24}{7} = 3.428\dots$, cf. [40]. Also, for DMM the EV estimates returned by CorePPL and webPPL appear to be consistently lower than the midpoint of the interval returned by VPF.

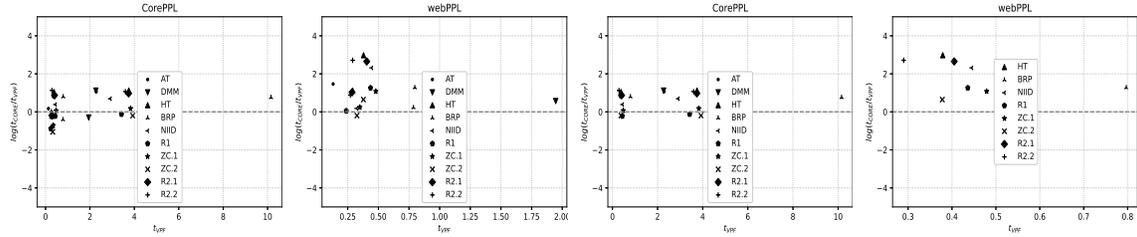


FIGURE 2. For $N = 10^5, 10^6$, scatterplots of the log-ratios of execution times, $\log_{10}(\text{time}_{\text{tool}}/\text{time}_{\text{VPF}})$, based on data points in Table 1. From left to right: $N = 10^5$, $\text{tool} = \text{CorePPL}$; $N = 10^5$, $\text{tool} = \text{WebPPL-smc}$; $N = 10^6$, $\text{tool} = \text{CorePPL}$; $N = 10^6$, $\text{tool} = \text{WebPPL-smc}$. For $N = 10^6$, the vast majority of the data points lie above the x-axis, indicating superior performance of VPF across different examples. An enlarged version of these plots is reported in Appendix C.

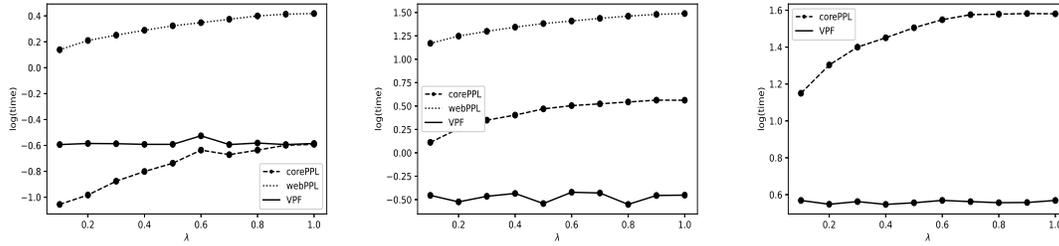



FIGURE 3. Execution times (in seconds) for the RW2 program, as a function of the probability λ of conditioning on external data for $N = 10^4$ (left), $N = 10^5$ (center) and $N = 10^6$ (right). webPPL missing from the right-most plot due to time-out. Execution times of VPF are basically insensitive to λ .

that are higher or comparable to those of the other tools. We refer the reader to Appendix C for additional explanation, in particular as to the significance of the mentioned exception.

Execution time. For larger values of N VPF generally outperforms the other considered tools in terms of execution time. The difference is especially noticeable for $N = 10^6$. Figure 2 provides a graphical comparison, with scatterplots showing the ratio of execution times ($\text{time}_{\text{other-tool}}/\text{time}_{\text{VPF}}$) on a log scale, across the different examples (actual data points in Table 1). In the case of WebPPL, nearly all data points lie above the x-axis, indicating superiority of VPF. In the case of CorePPL, for $N = 10^5$ the data points are quite uniformly distributed across the x-axis, indicating basically a tie. For $N = 10^6$, we have a majority of points above the x-axis, indicating again superiority of VPF, sometimes by orders of magnitude.

A closer look in the $N = 10^6$ case reveals that the only programs where CorePPL beats VPF are RW1 and ZC. This is most likely due to the low probability of conditioning in these programs; for instance in RW1 just a single final conditioning is performed. As in CorePPL resampling is only performed following a conditioning, this may explain its lower execution times in these cases. To further investigate this issue, we consider a version of RW2 where the probability of conditioning is governed by a parameter $\lambda \in [0, 1]$, and run it for different values of λ . The obtained results are showed in Figure 3. We observe that for both CorePPL and WebPPL execution time tends to increase as the probability λ of conditioning increases; on the contrary, the execution time of VPF appears to be insensitive to λ . This suggests that VPF has a definite advantage over tools with explicit resample, on models with heavy conditioning. The difference between CorePPL and VPF is further analyzed in the next paragraph in terms of scalability.

Scalability. The plot on the right shows the behaviour the *average unit cost (per particle)* of VPF, CorePPL and WebPPL across all the models we analyzed for $N = 10^3, \dots, 10^6$ on a log-scale. Here, for each N the average unit cost (in seconds) across k models is $(t_1 + t_2 + \dots + t_k)/(N \cdot k)$, with t_i the execution time of the i -th model. Consistently with Figure 3, we observe that the cost of VPF decreases as the number of samples increases, whereas the cost of the other tools remains constant or increases (webPPL).

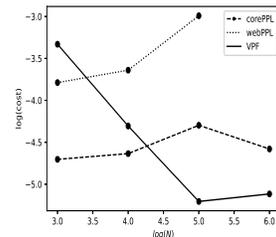

8. CONCLUSION

We have proposed a framework for inference in universal probabilistic programs that combines a rigorous trace-based operational semantics with practical algorithmic realizability. The approach builds on a structured operational model and connects to classical tools in stochastic process theory (FK models), leading to an inference method that is both theoretically sound and efficiently implementable. We summarize the main insights of our approach and possible future directions below.

Structured semantics via PPGs (Sections 3 and 4). Our framework is centered around an automata-theoretic description format for programs, Probabilistic Program Graphs (PPGs). In PPGs, transitions encode sampling behavior, while nodes represent conditioning checkpoints via score functions. This structure supports a rigorous infinite-trace semantics and facilitates the alignment of computations, a feature that becomes crucial for vectorized implementations.

Approximation via Feynman-Kac models (Sections 5 and 6). The main theoretical contribution is a novel connection between the infinite-trace semantics of PPGs and Feynman-Kac (FK) models, a standard tool in the analysis of state-based stochastic processes. The expected values of a broad class of *prefix-closed* functions over infinite traces can be expressed in terms of finite, truncated computations. In particular, Theorem 2 establishes that these expectations can be bounded by quantities defined over finite-length traces, making inference tractable in the presence of unbounded loops and conditioning. Theorem 3 shows that these bounds converge to the exact value under mild assumptions. We then establish a connection with FK models: in particular Theorem 4 reformulates the approximation bounds in terms of the *filtering* distributions of a PPG-induced FK model —distributions that can be consistently and efficiently estimated via particle filtering (PF).

Efficient and parallel inference (Section 7). A central insight of our approach is that the operational structure of PPGs enables a naturally parallelizable implementation of inference. Since all particles evolve synchronously (in lock-step) through the same control-flow graph (PPG), and conditioning is applied via score functions in a uniform, aligned fashion, our particle filtering algorithm maps directly to SIMD-style vectorized execution. This design avoids the particle misalignment issues that affect continuation-based or functional semantics for PPLs. As a result, our operational model is easily mapped into modern hardware architectures supporting data-level parallelism. Our vectorized implementation of a PPG-based particle filter, VPF, practically demonstrates the effectiveness of our approach. On challenging examples involving nested conditioning and unbounded loops, VPF matches

or outperforms state-of-the-art probabilistic programming systems in both accuracy and runtime.

Future directions. On the practical side, developing compilers from high-level PPLs to PPGs, extending the framework to richer type systems and data structures is a natural next-step. Combining a sampling-based approach with symbolic or constraint-based reasoning techniques is a challenging theoretical direction.

REFERENCES

- [1] Martín Abadi, Paul Barham, Jianmin Chen, Zhifeng Chen, Andy Davis, Jeffrey Dean, Matthieu Devin, Sanjay Ghemawat, Geoffrey Irving, Michael Isard, Josh Levenberg, Manjunath Kudlur, Rajat Monga, Sherry Moore, Derek G. Murray, Benoit Steiner, Paul Tucker, Vijay Vasudevan, Pete Warden, Martin Wicke, Yuan Yu, and Xiaoqiang Zheng. Tensorflow: A system for large-scale machine learning. *Proceedings of the 12th USENIX Symposium on Operating Systems Design and Implementation (OSDI '16)*. *arXiv:1605.08695*, 2016.
- [2] Robert B. Ash. Real analysis and probability. *Academic Press, Inc., New York, NY, USA*, 1972.
- [3] Martin Avanzini, Georg Moser, and Michael Schaper. Automated expected value analysis of recursive programs. *roc. ACM Program. Lang.*, 7, *PLDI*, 2023.
- [4] Alexander Bagnall, Gordon Stewart, and Anindya Banerjee. Formally verified samplers from probabilistic programs with loops and conditioning. *Proc. ACM Program. Lang.*, 7, 1–24, 2023.
- [5] Christel Baier and Joost-Pieter Katoen. Principles of model checking. *MIT press*, 2008.
- [6] Jialu Bao, Nitesh Trivedi, Drashti Pathak, Justin Hsu, and Subhajit Roy. Data-driven invariant learning for probabilistic programs. In: *CAV. Lecture Notes in Computer Science*, vol. 13371, pp. 33–54. Springer, 2022.
- [7] Gilles Barthe, Joost-Pieter Katoen, and Alexandra Silva. Foundations of probabilistic programming. *Cambridge University Press*, 2020.
- [8] Ezio Bartocci, Laura Kovács, and Miroslav Stankovic. Mora-automatic generation of moment-based invariants. *International Conference on Tools and Algorithms for the Construction and Analysis of Systems*. Springer, 492–498, 2020.
- [9] Kevin Batz, Mingshuai Chen, Sebastian Junges, Benjamin Lucien Kaminski, Joost-Pieter Katoen, and Christoph Matheja. Probabilistic program verification via inductive synthesis of inductive invariants. In *Sankaranarayanan, S., Sharygina, N. (eds) Tools and Algorithms for the Construction and Analysis of Systems. TACAS 2023. Lecture Notes in Computer Science*, vol 13994. Springer, 2023.
- [10] Raven Beutner, Luke Ong, and Fabian Zaiser. Guaranteed bounds for posterior inference in universal probabilistic programming. In *Proceedings of the 43rd ACM SIGPLAN international conference on programming language design and implementation, (PLDI 22)*, 2022.
- [11] Sooraj Bhat, Johannes Borgström, Andrew D. Gordon, and Claudio Russo. Deriving probability density functions from probabilistic functional programs. In *Proceedings of the International Conference on Tools and Algorithms for the Construction and Analysis of Systems (TACAS 2013)*, 2013.
- [12] Eli Bingham, Jonathan P Chen, Martin Jankowiak, Fritz Obermeyer, Neeraj Pradhan, Theofanis Karaletsos, Rohit Singh, Paul Szerlip, Paul Horsfall, and Noah D Goodman. Pyro: Deep universal probabilistic programming. *The Journal of Machine Learning Research* 20, 1, 973–978, 2019.
- [13] Michele Boreale. Algorithms for exact and approximate linear abstractions of polynomial continuous systems. In *Proceedings of the 21st International Conference on Hybrid Systems: Computation and Control (HSCC)*, pages 207–216. ACM, 2018.
- [14] Michele Boreale. Complete algorithms for algebraic strongest postconditions and weakest preconditions in polynomial ode’s. In *SOFSEM 2018: Theory and Practice of Computer Science*, volume 10706 of *LNCS*, pages 442–455. Springer, 2018.
- [15] Michele Boreale. Algebra, coalgebra, and minimization in polynomial differential equations. *Logical Methods in Computer Science*, 15(1), 2019.
- [16] Michele Boreale. On the coalgebra of partial differential equations. In *44th International Symposium on Mathematical Foundations of Computer Science (MFCS)*, volume 138 of *LIPICs*, pages 24:1–24:13. Schloss Dagstuhl–Leibniz-Zentrum für Informatik, 2019.

- [17] Michele Boreale. Automatic pre- and postconditions for partial differential equations. *Information and Computation*, 285:104860, 2022.
- [18] Michele Boreale, Roberto Bruni, Rocco De Nicola, and Michele Loreti. Caspis: a calculus of sessions, pipelines and services. *Mathematical Structures in Computer Science*, 25(3):666–709, 2015.
- [19] Michele Boreale and Luisa Collodi. Bayesian parameter estimation with guarantees via interval analysis and simulation. In *VMCAI 2023: Verification, Model Checking, and Abstract Interpretation*, volume 13881 of *LNCS*, pages 106–128. Springer, 2023.
- [20] Michele Boreale and Luisa Collodi. Guaranteed inference for probabilistic programs: a parallelisable, small-step operational approach. *Lecture Notes in Computer Science, Vol. 14500*, Springer, 2023.
- [21] Michele Boreale and Luisa Collodi. Code for the experiments described in the present paper. <https://github.com/Luisa-unifi/Vectorized-Particle-Filtering>. 2025.
- [22] Michele Boreale and Luisa Collodi. Parallelizable feynman-kac models for universal probabilistic programming. In Giorgio Bacci and Adrian Francalanza, editors, *Proceedings of the Sixteenth International Symposium on Games, Automata, Logics, and Formal Verification, GandALF 2025, Valletta, Malta, 16-17th September 2025*, volume 428 of *EPTCS*, pages 91–110, September 2025.
- [23] Michele Boreale and Daniele Gorla. Approximate model counting, sparse xor constraints and minimum distance. In *The Art of Modelling Computational Systems: A Journey from Logic and Concurrency to Security and Privacy*, volume 11760 of *LNCS*, pages 363–378. Springer, 2019.
- [24] Michele Boreale and Francesca Pampaloni. Quantitative information flow under generic leakage functions and adaptive adversaries. In *FORTE 2014: Formal Techniques for Distributed Objects, Components, and Systems*, volume 8461 of *LNCS*, pages 166–181. Springer, 2014.
- [25] Michele Boreale and Michela Paolini. On formally bounding information leakage by statistical estimation. In *ISC 2014: Information Security Conference*, volume 8783 of *LNCS*, pages 216–236. Springer, 2014.
- [26] Johannes Borgström, Ugo Dal Lago, Andrew D. Gordon, and Marcin Szymczak. A lambda-calculus foundation for universal probabilistic programming. *ACM SIGPLAN Notices* 51.9: 33-46, 2016.
- [27] Bob Carpenter, Andrew Gelman, Matthew D. Hoffman, Daniel Lee, Ben Goodrich, Michael Betancourt, Marcus Brubaker, Jiqiang Guo, Peter Li, and Allen Riddell. Stan: A probabilistic programming language. *Journal of Statistical Software* 76(1), 2017.
- [28] Nicolas Chopin and Omiros Papaspiliopoulos. An introduction to sequential monte carlo. *Springer Nature Switzerland AG*, 2021.
- [29] Marco F. Cusumano-Towner, Feras A. Saad, Alexander K. Lew, and Vikash K. Mansinghka. Gen: A general-purpose probabilistic programming system with programmable inference. In *Proceedings of the 40th ACM SIGPLAN Conference on Programming Language Design and Implementation (PLDI) pp. 221–236*. New York, NY, USA, 2019.
- [30] Víctor Elvira, Luca Martino, and Christian P. Robert. Rethinking the effective sample size. *arXiv: 1809. 04129*, 2018.
- [31] Timon Gehr, Sasa Misailovic, and Martin T. Vechev. Psi: Exact symbolic inference for probabilistic programs. *Proceedings of the 28th International Conference in Computer Aided Verification (CAV 2016), Toronto, page 62–83*, 2016.
- [32] Noah D. Goodman, Vikash Mansinghka, Daniel Roy, Keith Bonawitz, and Joshua Tenenbaum. Church: a language for generative models. *Proc. Uncertainty in Artificial Intelligence*, 2008.
- [33] Noah D. Goodman and Andreas Stuhlmüller. The design and implementation of probabilistic programming languages. *Proceedings of the 28th International Conference in Computer Aided Verification (CAV 2016), Toronto, page 62–83*, 2016.
- [34] Andrew D. Gordon, Thomas A. Henzinger, Aditya V. Nori, and Sriram K. Rajamani. Probabilistic programming. *Proceedings of Future of Software Engineering Proceedings (FOSE2014), pages 167–181*, 2014.
- [35] Maria I. Gorinova, Andrew D. Gordon, and Charles Sutton. Probabilistic programming with densities in slicstan: efficient, flexible, and deterministic. *Proceedings of the ACM on Programming Languages* 3, *POPL.1-30*, 2019.
- [36] Maria I. Gorinova, Andrew D. Gordon, Charles Sutton, and Matthijs Vákár. Conditional independence by typing. *ACM Transactions on Programming Languages and Systems (TOPLAS)* 44.1: 1-54, 2021.
- [37] Michikazu Hirata, Yasuhiko Minamide, and Tetsuya Sato. Semantic foundations of higher-order probabilistic programs in isabelle/hol. *14th International Conference on Interactive Theorem Proving (ITP)*,

2023. *Leibniz International Proceedings in Informatics (LIPIcs)*, Volume 268, pp. 18:1-18:18, Schloss Dagstuhl – Leibniz-Zentrum für Informatik, 2023.
- [38] Benjamin L. Kaminski. Advanced weakest precondition calculi for probabilistic programs. *Doctoral thesis (Ph.D)*, RWTH Aachen University, 2019.
- [39] Dexter Katoen. Semantics of probabilistic programs. *Journal of Computer and System Sciences*, 22(3):328–350, 1981.
- [40] Lutz Klinkenberg, Christian Blumenthal, Mingshuai Chen, Darion Haase, and Joost-Pieter Katoen. Exact bayesian inference for loopy probabilistic programs using generating functions. In *Proceedings of the ACM on Programming Languages (OPSLA)*, Volume 8: 127,923-953, 2024.
- [41] Alexander K. Lew, George Matheos, Tan Zhi-Xuan, Matin Ghavamizadeh, Nishad Gothoskar, Stuart Russell, and Vikash K. Mansinghka. Smcp3: Sequential monte carlo with probabilistic program proposals. *Proceedings of The 26th International Conference on Artificial Intelligence and Statistics (AISTATS)*. PMLR 206:7061-7088, 2023.
- [42] Daniel Lundén, Johannes Borgström, and David Broman. Correctness of sequential monte carlo inference for probabilistic programming languages. *Programming Languages and Systems*, pp. 404–431. Springer International Publishing, 2021.
- [43] Daniel Lundén, David Broman, Fredrik Ronquist, and Lawrence M. Murray. Automatic alignment of sequential monte carlo inference in higher-order probabilistic programs. In *ESOP*, pages 535-563, 2023.
- [44] Daniel Lundén, Joey Ohman, Jan Kudlicka, Viktor Senderov, Fredrik Ronquist, and David Broman. Compiling universal probabilistic programming languages with efficient parallel sequential monte carlo inference. In *ESOP*, pages 29–56, 2022.
- [45] Héctor D. Menéndez, Michele Boreale, Daniele Gorla, and David Clark. Output sampling for output diversity in automatic unit test generation. *IEEE Transactions on Software Engineering*, 48(2):295–308, 2022.
- [46] Tshepo Mokoena. Urban myths: Are you never more than 6ft from a rat in a city? *The Guardian online*, <https://www.theguardian.com/cities/2014/feb/13/urban-myths-6ft-from-a-rat>., 2014.
- [47] Pierre Del Moral, Arnaud Doucet, and Ajay Jasra. Sequential monte carlo samplers. *Journal of the Royal Statistical Society. Series B (Statistical Methodology)*, Vol. 68, No. 3, pp. 411-436, 2006.
- [48] Praveen Narayanan, Jacques Carette, Chungchieh Shan Wren Romano, and Robert Zinkov. Probabilistic inference by program transformation in hakaru (system description). In *Proceedings of the 13th International Symposium on Functional and Logic Programming (FLOPS 2016)*, pages 62–79, 2016.
- [49] Aditya V. Nori, Chung-Kil Hur, Sriram K. Rajamani, and Selva Samuel. R2: An efficient mcmc sampler for probabilistic programs. *Proceedings of the Twenty-Eighth AAAI Conference on Artificial Intelligence*, page 2476–2482, 2014.
- [50] Francesca Randone, Luca Bortolussi, Emilio Incerto, and Mirco Tribastone. Inference of probabilistic programs with moment-matching gaussian mixtures. *Proceedings of the ACM on Programming Languages (POPL)*:1882-1912, 2024.
- [51] Sriram Sankaranarayanan, Aleksandar Chakarov, and Sumit Gulwani. Static analysis for probabilistic programs: Inferring whole program properties from finitely many paths. *Proceedings of the 34th ACM SIGPLAN conference on Programming language design and implementation.*, 2013.
- [52] Adam Scibior, Ohad Kammar, Matthijs Vákár, Sam Staton, Hongseok Yang, Yufei Cai, Klaus Ostermann, Sean K. Moss, Chris Heunen, and Zoubin Ghahramani. Denotational validation of higher-order bayesian inference. *Proceedings of the ACM on Programming Languages 2*. POPL. 1-29, 2017.
- [53] Sam Staton. Commutative semantics for probabilistic programming. *Proceedings of the 26th European Symposium on Programming (ESOP2017)*, Uppsala, Sweden, 2017.
- [54] Sam Staton, Frank Wood, Hongseok Yang, Chris Heunen, and Ohad Kammar. Semantics for probabilistic programming: higher-order functions, continuous distributions, and soft constraints. *Proceedings of the 31st Annual ACM/IEEE Symposium on Logic in Computer Science (LICS)*, 2016.
- [55] Zachary Susag, Sumit Lahiri, Justin Hsu, and Subhajit Roy. Symbolic execution for randomized programs. *Proc. ACM Program. Lang.*, 6, OOPSLA, 1583–1612, 2022.
- [56] Joseph Tassarotti and Jean-Baptiste Tristan. Verified density compilation for a probabilistic programming language. *Proceedings of the ACM on Programming Languages 7*, PLDI. 615-637, 2023.
- [57] Peixin Wang, Tengshun Yang, Hongfei Fu, and C.-H. Luke Ong Guanyan Li. Static posterior inference of bayesian probabilistic programming via polynomial solving. *Proceedings of the ACM on Programming Languages*, Volume 8, Issue PLDI’24, 202, 1361 - 1386, 2024.

- [58] Frank Wood, Jan Willem Meent, and Vikash Mansinghka. A new approach to probabilistic programming inference. *Proceedings of the Seventeenth International Conference on Artificial Intelligence and Statistics, PMLR 33:1024-1032*, 2014.
- [59] Yi Wu, Siddharth Srivastava, Nicholas Hay, Simon Du, and Stuart Russell. Discrete-continuous mixtures in probabilistic programming: Generalized semantics and inference algorithms. *Proceedings of the 35th International Conference on Machine Learning, PMLR 80:5343-5352*, 2018.

APPENDIX A. PROOFS

The following result, which subsumes Theorem 1, is well known from measure theory. The formulation below is a specialization of [2, Th.2.6.7] to Markov kernels and nonnegative functions. Part (a) gives a way to construct a measure on the product space Ω^t , starting from an initial measure μ^1 and $t - 1$ Markov kernels. The product space is, intuitively, the sample space of the paths of length t of a Markov chain. In particular, a path of length $t = 1$ consists of just an initial state — no transition has been fired. Part (b) is a generalization of Fubini theorem, which allows one to express an integral over the product space w.r.t. the measure of part (a) in terms of iterated integrals over the component spaces. Below, we will let ω^t range over Ω^t .

Theorem A.1 (product of measures). *Let $t \geq 1$ be an integer. Let μ^1 be a probability measure on Ω and K_2, \dots, K_t be $t - 1$ (not necessarily distinct) Markov kernels from Ω to Ω .*

- (a) *There is a unique probability measure μ^t defined on $(\Omega^t, \mathcal{F}^t)$ such that for every $A_1 \times \dots \times A_t \in \mathcal{F}^t$ we have:*

$$\mu^t(A_1 \times \dots \times A_t) = \int_{A_1} \mu^1(d\omega_1) \int_{A_2} K_2(\omega_1)(d\omega_2) \cdots \int_{A_t} K_t(\omega_{t-1})(d\omega_t). \quad (\text{A.1})$$

- (b) *(Fubini) Let f be a nonnegative measurable function defined on Ω^t . Then, letting $\omega^t = (\omega_1, \dots, \omega_t)$, we have*

$$\int \mu^t(\omega^t) f(\omega^t) = \int \mu^1(d\omega_1) \int K_2(\omega_1)(d\omega_2) \cdots \int K_t(\omega_{t-1})(d\omega_t) f(\omega^t). \quad (\text{A.2})$$

In particular, on the right-hand side, for each $j = 1, \dots, t - 1$ and $(\omega_1, \dots, \omega_{j-1})$, the function $\omega_j \mapsto \int K_{j+1}(\omega_j)(d\omega_{j+1}) \cdots \int K_t(\omega_{t-1})(d\omega_t) f(\omega^t)$ is measurable over Ω .

We now proceed to the proof of the results stated in the paper.

Proof of Lemma 1. As a function $\overline{\mathbb{R}}^{m+1} \times \mathcal{F} \rightarrow \overline{\mathbb{R}}^+$, κ can be written as follows:

$$\kappa(v, z)(A) = [z \notin \mathcal{P}] \cdot \delta_v(A_z) + \sum_{(S, \varphi, \zeta, S') \in E} [z = S] \cdot \varphi(v) \cdot \zeta(v)(A_{S'}). \quad (\text{A.3})$$

We now check the two properties required by Definition 1.

- For each $(v, z) \in \Omega$, the function $A \mapsto \kappa(v, z)(A)$ is a probability measure. Consider the right-hand side of (A.3): since for each S , $\sum_{(S, \varphi, \zeta, S') \in E} \varphi(v) = 1$, for the given (v, z) exactly one of the summands is different from the constant 0 function. In particular, there is a probability measure ν on \mathcal{F}_m such that for every $A \in \mathcal{F}$, we have $\kappa(v, z)(A) = \nu(A_z)$. Next, we note the following general property of sections of measurable sets, which can be shown by elementary set-theoretic reasoning: for any measurable set $A \in \mathcal{F}$ s.t. $A = \cup_{j \geq 0} A_j$ (disjoint union of measurable sets) and $z \in \overline{\mathbb{R}}$, we have $A_z = \cup_{j \geq 0} (A_j)_z$ (disjoint union of measurable sets). Applying the two facts just established and the additivity of the measure ν , we have: $\kappa(v, z)(A) = \nu((\cup_{j \geq 0} A_j)_z) = \nu(\cup_{j \geq 0} (A_j)_z) = \sum_{j \geq 0} \nu((A_j)_z) = \sum_{j \geq 0} \kappa(v, z)(A_j)$. This shows that $\kappa(v, z)$ is a measure. Moreover, $\kappa(v, z)(\Omega) = \nu(\Omega_z) = \nu(\overline{\mathbb{R}}^m) = 1$, which completes the prove that $\kappa(v, z)$ is a probability measure.
- For each $A \in \mathcal{F}$, the function $(v, z) \mapsto \kappa(v, z)(A)$ is nonnegative and measurable. Consider again the right-hand side of (A.3), but write $\delta_v(A_z)$ as the indicator function $1_{A_z}(v)$: as a function of v , this is measurable (as A_z is a measurable set). Moreover, for any A and S' , $\zeta(v)(A_{S'})$ is a measurable function of v (as ζ is a Markov kernel); hence for each φ , also $\varphi(v) \cdot \zeta(v)(A_{S'})$ is a measurable function of v . But any measurable function of v alone, say $h(v)$, is also a measurable function of (v, z) (i.e. the function obtained by composing

the projection $(v, z) \mapsto v$ with $v \mapsto h(v)$). Likewise, the predicates $[z \notin \mathcal{P}]$ and $[z = S]$ (for any fixed $S \in \mathcal{P}$) are measurable functions of z , hence of (v, z) . As $\kappa(\cdot)(A)$ is obtained by products and sums of nonnegative measurable functions of (v, z) , it is a measurable function of (v, z) [2, Ch.1,Th.1.5.6]. \square

The following is a general lemma useful to connect measure over sets of infinite and finite traces. In its statement, we let μ^∞ denote a generic measure on the cylindrical sigma-field, obtained as an infinite product of kernels in the sense of the Ionescu-Tulcea theorem, and by μ^t the corresponding finite product measures. We shall make use of the following notation. For $\tilde{\omega} = (\omega_1, \omega_2, \dots) \in \Omega^\infty$, we let $\tilde{\omega}_{1:t} := (\omega_1, \dots, \omega_t) \in \Omega^t$. For $h : \Omega^t \rightarrow \overline{\mathbb{R}}^+$ a nonnegative function, we let $\tilde{h} : \Omega^\infty \rightarrow \overline{\mathbb{R}}^+$ be defined as follows for each $\tilde{\omega} \in \Omega^\infty$:

$$\tilde{h}(\tilde{\omega}) := h(\tilde{\omega}_{1:t}). \quad (\text{A.4})$$

In the what follows, we shall make use of the following properties of measurable cylinders: for measurable $A, B \subseteq \Omega^t$ ($t \geq 1$), we have $\mathbf{c}(A \cup B) = \mathbf{c}(A) \cup \mathbf{c}(B)$ and $\mathbf{c}(A \cap B) = \mathbf{c}(A) \cap \mathbf{c}(B)$.

Lemma A.1. *Let $h : \Omega^t \rightarrow \overline{\mathbb{R}}^+$ a nonnegative measurable function. Then \tilde{h} as defined in (A.4) is measurable. Moreover, for each measurable cylinder $\mathbf{c}(B_t) \subseteq \Omega^\infty$ ($B_t \subseteq \Omega^t$), we have $\int_{\mathbf{c}(B_t)} \mu^\infty(d\tilde{\omega}) \tilde{h}(\tilde{\omega}) = \int_{B_t} \mu^t(d\omega^t) h(\omega^t)$.*

Proof. First, consider the case of indicator functions $h = 1_{A_t}$, for a measurable $A_t \subseteq \Omega^t$. Then $\tilde{h} = 1_{\mathbf{c}(A_t)}$, the indicator function of the measurable cylinder generated by A_t , and the statement is obvious, because h is measurable, and $\int_{\mathbf{c}(B_t)} \mu^\infty(d\tilde{\omega}) \tilde{h}(\tilde{\omega}) = \int \mu^\infty(d\tilde{\omega}) \tilde{h}(\tilde{\omega}) 1_{\mathbf{c}(B_t)}(\tilde{\omega}) = \mu^\infty(\mathbf{c}(B_t) \cap \mathbf{c}(A_t)) = \mu^\infty(\mathbf{c}(B_t \cap A_t)) = \mu^t(B_t \cap A_t) = \int_{B_t} \mu^t(d\omega^t) h(\omega^t)$. The statement for the general case of h follows then by standard measure-theoretic arguments (linearity, dominated convergence). \square

We can now readily establish measurability of various functions used throughout the paper.

Lemma A.2 (measurability of functions). *Let $t \geq 1$. The following functions are measurable: (1) $w_t : \Omega^t \rightarrow [0, 1]$; (2) $w : \Omega^\infty \rightarrow [0, 1]$; (3) $f_t : \Omega^t \rightarrow \overline{\mathbb{R}}^+$, provided $f : \Omega^\infty \rightarrow \overline{\mathbb{R}}^+$ is measurable.*

Proof. Concerning parts 1 and 2, first note one can write the score function on Ω (Definition (4.1)) as: $\text{sc}(v, z) = [z \notin \mathcal{P}] + \sum_{S \in \mathcal{P}} [z = S] \cdot \mathbf{sc}(S)(v)$, where $\gamma = \mathbf{sc}(S)$ is a measurable score function on $\overline{\mathbb{R}}^m$. This easily implies that $\text{sc}(\cdot)$ is measurable on Ω (cf. also the proof of Lemma 1, second item). As $w_t(\omega^t) = \text{sc}(\omega_1) \cdots \text{sc}(\omega_t)$ is the product of measurable functions on Ω , it is a measurable function on Ω^t . Now consider $\tilde{w}_t : \Omega^\infty \rightarrow [0, 1]$: applying Lemma A.1 with $h = w_t$, we deduce that \tilde{w}_t is measurable. Finally, as $t \rightarrow +\infty$, it is seen that $\tilde{w}_t \rightarrow w$ pointwise: then w is measurable as well, because it is the pointwise limit of a sequence of measurable functions, cf. [2, Th.1.5.4].

Concerning part 3, define the t -section of $C \in \mathcal{C}$ at $\tilde{\omega} \in \Omega^\infty$ as $C_{\tilde{\omega}}^t := \{\omega^t \in \Omega^t : (\omega^t, \tilde{\omega}) \in C\}$. A proof very similar to that given in [2, Th.2.6.2(1)] for finite products shows that t -sections of elements in \mathcal{C} are measurable. Now let A be any measurable set in $\overline{\mathbb{R}}$. By definition, $f^{-1}(A) = \{(\omega^t, \tilde{\omega}) : f(\omega^t, \tilde{\omega}) \in A\}$ is measurable. The t -section at $\tilde{\omega} = \star^\infty$ of this set is precisely $f_t^{-1}(A)$, hence it is measurable. This implies that f_t is measurable. \square

We now turn to the proof of Theorem 2. We first prove a few results about the measures μ_S^∞ and μ_S^t . In what follows, we shall consider the notation $\int f d\mu$ for $\int \mu(d\omega) f(\omega)$. We shall use the two notations interchangeably; the second one is more convenient for expressing iterated integrals. We need the following definition.

Definition A.1 (consistent paths). *We define the following measurable subsets of Ω^t ($t \geq 1$) and Ω^∞ :*

$$\Theta^{\leq t} := \bigcup_{j=0}^{t-1} (\mathbb{T}^c)^j \cdot \mathbb{T}^{t-j} \quad \Theta_t := \Theta^{\leq t} \cup (\mathbb{T}^c)^t \quad \Theta := \left(\bigcup_{j \geq 0} (\mathbb{T}^c)^j \cdot \mathbb{T}^\infty \right) \cup (\mathbb{T}^c)^\infty. \quad (\text{A.5})$$

Lemma A.3. (a) $\mu_S^\infty(\Theta) = 1$. Hence for any measurable set A and nonnegative measurable f defined on Ω^∞ , $\int_A f d\mu_S^\infty = \int_{A \cap \Theta} f d\mu_S^\infty$.

(b) Let $t \geq 1$. Then $\mu_S^t(\Theta_t) = 1$. Hence for any measurable set A and nonnegative measurable f defined on Ω^t , $\int_A f d\mu_S^t = \int_{A \cap \Theta_t} f d\mu_S^t$.

Proof. Let us consider part (a). Consider $\Theta^c = \bigcup_{j \geq 0} \mathfrak{c}(\Omega^j \cdot \mathbb{T} \cdot \mathbb{T}^c)$; note that this union is in general not disjoint, but this is not relevant for the rest of the proof. For any $j \geq 0$, we will show that $\mu_S^\infty(\mathfrak{c}(\Omega^j \cdot \mathbb{T} \cdot \mathbb{T}^c)) = 0$, which implies the thesis. Indeed, $\mu_S^\infty(\mathfrak{c}(\Omega^j \cdot \mathbb{T} \cdot \mathbb{T}^c)) = \mu_S^{j+2}(\Omega^j \cdot \mathbb{T} \cdot \mathbb{T}^c)$, by definition of the product measure μ_S^∞ . Theorem A.1(a) (Fubini) gives us

$$\mu_S^{j+2}(\Omega^j \mathbb{T} \mathbb{T}^c) = \int \delta_{(0,S)}(d\omega_1) \int \kappa(\omega_1)(d\omega_2) \int \cdots \int_{\mathbb{T}} \kappa(\omega_j)(d\omega_{j+1}) \int_{\mathbb{T}^c} \kappa(\omega_{j+1})(d\omega_{j+2}) 1. \quad (\text{A.6})$$

Considering the innermost two integrals in the above expression, let $J(\omega_j) := \int_{\mathbb{T}} \kappa(\omega_j)(d\omega_{j+1}) \int_{\mathbb{T}^c} \kappa(\omega_{j+1})(d\omega_{j+2}) 1 = \int \kappa(\omega_j)(d\omega_{j+1}) \int \kappa(\omega_{j+1})(d\omega_{j+2}) 1_{\mathbb{T}}(\omega_{j+1}) \cdot 1_{\mathbb{T}^c}(\omega_{j+2})$. Suppose $\omega_{j+1} = (v, \text{nil}) \in \mathbb{T}$: then considering the innermost integral in $J(\omega_j)$, by definition of κ we have $\int \kappa(\omega_{j+1})(d\omega_{j+2}) 1_{\mathbb{T}}(\omega_{j+1}) \cdot 1_{\mathbb{T}^c}(\omega_{j+2}) = \int \kappa(v, \text{nil})(d\omega_{j+2}) 1_{\mathbb{T}^c}(\omega_{j+2}) = \int \delta_{(v, \text{nil})}(d\omega_{j+2}) 1_{\mathbb{T}^c}(\omega_{j+2}) = 1_{\mathbb{T}^c}(v, \text{nil}) = 0$. Similarly, we have that the innermost integral is 0 if $\omega_{j+1} \in \mathbb{T}^c$. This implies that $J(\omega_j) = 0$, hence the integral in (A.6) is 0.

The proof of part (b) is similar. \square

Lemma A.4. *Let $S \in \mathcal{P}$. As $t \rightarrow +\infty$, we have $[S]^t 1_{\mathbb{T}^{\leq t}} \cdot w_t \rightarrow [S] 1_{\mathbb{T}_f} \cdot w$. Moreover, the sequence $[S]^t 1_{\mathbb{T}^{\leq t}} \cdot w_t$ ($t \geq 1$) is monotonically nondecreasing.*

Proof. For each $t \geq 1$, consider the function $h_t = 1_\Theta \cdot \widetilde{(1_{\mathbb{T}^{\leq t}} \cdot w_t)}$, defined on Ω^∞ and measurable, being the product of two measurable functions (measurability of $\widetilde{\cdot}$ follows from Lemma 1). It is easy to check that: (1) $(h_t)_{t \geq 1}$ is a monotonically nondecreasing sequence of functions; and that (2) as $t \rightarrow +\infty$, $h_t \rightarrow 1_\Theta \cdot 1_{\mathbb{T}_f} \cdot w$ pointwise. By the Monotone Convergence Theorem [2, Th.1.6.2], $\int h_t d\mu_S^\infty \rightarrow \int 1_\Theta \cdot 1_{\mathbb{T}_f} \cdot w d\mu_S^\infty$, where the sequence of integrals on the left is nondecreasing. Now, applying Lemma A.3(a) and Lemma A.1 with $B_t = \Omega^t$, we get $\int h_t d\mu_S^\infty = \int_\Theta \widetilde{(1_{\mathbb{T}^{\leq t}} \cdot w_t)} d\mu_S^\infty = \int \widetilde{(1_{\mathbb{T}^{\leq t}} \cdot w_t)} d\mu_S^\infty = \int 1_{\mathbb{T}^{\leq t}} w_t d\mu_S^t$, where the last quantity is by definition $[S]^t 1_{\mathbb{T}^{\leq t}} w_t$. Similarly, by Lemma A.3(a) $\int 1_\Theta \cdot 1_{\mathbb{T}_f} \cdot w d\mu_S^\infty = \int 1_{\mathbb{T}_f} \cdot w d\mu_S^\infty = [S] 1_{\mathbb{T}_f} \cdot w$. This completes the proof. \square

We need a lemma on the support of prefix-closed functions.

Lemma A.5. *Let f be a prefix-closed function with branches L_j ($j \geq 0$) and $t \geq 1$. Then $L^{>t} \cap T^{\leq t} = \emptyset$.*

Proof. For each $0 \leq j \leq t$, we have $L^{>j} \cap T_j = \emptyset$ (T-respectfulness), which implies $L^{>t} \cap T_j \cdot \Omega^{t-j} = \emptyset$ (as $L^{>t} \subseteq L^{>j} \cdot \Omega^{t-j}$). Therefore, recalling that $T^{\leq t} = \cup_{j=0}^t T_j \cdot \Omega^{t-j}$, we have $L^{>t} \cap T^{\leq t} = \emptyset$. \square

Proof of Lemma 2. We proceed by proving separately the upper bound and the lower bound in (5.1).

- (Upper bound). First, let us establish the inclusion $\text{supp}(f) \subseteq \mathbf{c}(L^{\leq t} \cap T^{\leq t}) \cup (\mathbf{c}(T^{\leq t}))^c$. Indeed, consider $\tilde{\omega} \in \text{supp}(f)$ such that $\tilde{\omega} \notin \mathbf{c}(L^{\leq t} \cap T^{\leq t}) = \mathbf{c}(L^{\leq t}) \cap \mathbf{c}(T^{\leq t})$. Then either $\tilde{\omega} \in (\mathbf{c}(T^{\leq t}))^c$, and there is nothing left to prove. Or $\tilde{\omega} \in \mathbf{c}(L_j)$ for some $j > t$, hence $\tilde{\omega} \in \mathbf{c}(L^{>t})$; by Lemma A.5, $L^{>t} \cap T^{\leq t} = \emptyset$, hence $\mathbf{c}(L^{>t}) \cap \mathbf{c}(T^{\leq t}) = \emptyset$; this implies that $\tilde{\omega} \notin \mathbf{c}(T^{\leq t})$, i.e. $\tilde{\omega} \in (\mathbf{c}(T^{\leq t}))^c$, which completes the proof of the wanted inclusion. As a consequence of the inclusion just established,

$$[S]f \cdot w \leq \underbrace{[S]f \cdot \mathbf{1}_{\mathbf{c}(L^{\leq t} \cap T^{\leq t})}}_{K_1} \cdot w + \underbrace{[S]f \cdot \mathbf{1}_{(\mathbf{c}(T^{\leq t}))^c}}_{K_2} \cdot w. \quad (\text{A.7})$$

We proceed now to separately bound K_1 and K_2 .

- *Upper bound on K_1 .* Using the notation introduced in (A.4), we first check that

$$\text{on } \mathbf{c}(L^{\leq t}), \text{ hence on } \mathbf{c}(L^{\leq t} \cap T^{\leq t}), \text{ we have } f \cdot \tilde{w}_t = \widetilde{(f_t \cdot w_t)}. \quad (\text{A.8})$$

In fact, for any $\omega^t \in L^{\leq t}$ and $\tilde{\omega} \in \Omega^\infty$, we have: $\widetilde{(f_t \cdot w_t)}(\omega^t, \tilde{\omega}) = (f_t \cdot w_t)(\omega^t) = f_t(\omega^t) \cdot w_t(\omega^t) = f(\omega^t, \star^\infty) \cdot \tilde{w}_t(\omega^t, \tilde{\omega}) = f(\omega^t, \tilde{\omega}) \cdot \tilde{w}_t(\omega^t, \tilde{\omega})$, where the equality $f(\omega^t, \star^\infty) = f(\omega^t, \tilde{\omega})$ stems from f being prefix-closed and from $(\omega^t, \tilde{\omega}), (\omega^t, \star^\infty) \in \mathbf{c}(L_j)$ for some $0 \leq j \leq t$; this proves (A.8). Now we have

$$K_1 = \int_{\mathbf{c}(L^{\leq t} \cap T^{\leq t})} f \cdot w \, d\mu_S^\infty \quad (\text{A.9})$$

$$\leq \int_{\mathbf{c}(L^{\leq t} \cap T^{\leq t})} f \cdot \tilde{w}_t \, d\mu_S^\infty \quad (\text{A.10})$$

$$= \int_{\mathbf{c}(L^{\leq t} \cap T^{\leq t})} \widetilde{(f_t \cdot w_t)} \, d\mu_S^\infty \quad (\text{A.11})$$

$$= \int_{L^{\leq t} \cap T^{\leq t}} f_t \cdot w_t \, d\mu_S^t \quad (\text{A.12})$$

$$= [S]^t f_t \cdot \mathbf{1}_{L^{\leq t} \cap T^{\leq t}} \cdot w_t \quad (\text{A.13})$$

where: (A.10) stems from $w \leq \tilde{w}_t$; in (A.11) we have used (A.8), and in (A.12) we have applied Lemma A.1 with $h = f_t \cdot w_t$ and $B_t = L^{\leq t} \cap T^{\leq t}$.

- *Upper bound on K_2 .* From $f \leq M$ and $w \leq \tilde{w}_t$, we obtain $K_2 \leq M \cdot [S] \mathbf{1}_{(\mathbf{c}(T^{\leq t}))^c} \cdot \tilde{w}_t = M \cdot (\int \tilde{w}_t \, d\mu_S^\infty - \int_{\mathbf{c}(T^{\leq t})} \tilde{w}_t \, d\mu_S^\infty)$. Now, apply Lemma A.1 to $h = w_t$: first with $B_t = \Omega^t$, to obtain $\int \tilde{w}_t \, d\mu_S^\infty = \int w_t \, d\mu_S^t = [S]^t w_t$; then with $B_t = T^{\leq t}$, to obtain $\int_{\mathbf{c}(T^{\leq t})} \tilde{w}_t \, d\mu_S^\infty = \int_{T^{\leq t}} w_t \, d\mu_S^t = [S]^t w_t \cdot \mathbf{1}_{T^{\leq t}}$. To sum up, we have:

$$K_2 \leq M \cdot ([S]^t w_t - [S]^t \mathbf{1}_{T^{\leq t}} \cdot w_t) = M \cdot [S]^t (1 - \mathbf{1}_{T^{\leq t}}) \cdot w_t. \quad (\text{A.14})$$

- (Lower bound). Recall that, for any $j \geq 1$, $T_j = (\mathsf{T}^c)^{j-1} \cdot \mathsf{T}$ and that $T^{\leq t} = \cup_{j=1}^t T_j \cdot \Omega^{t-j} \subseteq \Omega^t$. Consider now $\Theta^{\leq t} = \cup_{j=1}^t T_j \cdot \mathsf{T}^{t-j} \subseteq \Omega^t$. For the sake of conciseness, let us use the following abbreviation:

$$A_t := \Theta^{\leq t} \cdot \mathsf{T}^\infty \cap \mathfrak{c}(L^{\leq t} \cap T^{\leq t}). \quad (\text{A.15})$$

Clearly, $[S]f\mathsf{w} \geq [S]f\mathsf{w}1_{A_t} = \int_{A_t} f\mathsf{w} d\mu_S^\infty$. Now we check that:

$$\text{on } A_t, \text{ we have } f\mathsf{w} = \widetilde{(f_t \mathsf{w}_t)}. \quad (\text{A.16})$$

Indeed, for any $(\omega^t, \tilde{\omega}) \in A_t$, we have: $(f\mathsf{w})(\omega^t, \tilde{\omega}) = f(\omega^t, \tilde{\omega}) \cdot \mathsf{w}(\omega^t, \tilde{\omega}) = f(\omega^t, \star^\infty) \cdot \mathsf{w}(\omega^t, \tilde{\omega}) = f_t(\omega^t) \cdot \mathsf{w}_t(\omega^t) = (f_t \cdot \mathsf{w}_t)(\omega^t) = \widetilde{(f_t \cdot \mathsf{w}_t)}(\omega^t, \tilde{\omega})$, where: (i) $f(\omega^t, \tilde{\omega}) = f(\omega^t, \star^\infty)$ stems from f being prefix-closed, and $(\omega^t, \tilde{\omega}), (\omega^t, \star^\infty) \in \mathfrak{c}(L_j)$ for some $0 \leq j \leq t$; and, (ii) $\mathsf{w}(\omega^t, \tilde{\omega}) = \mathsf{w}_t(\omega^t)$ stems from $(\omega^t, \tilde{\omega}) \in T_j \cdot \mathsf{T}^\infty$ for some $0 \leq j \leq t$, and recalling that the basic weight function $\text{sc}(\cdot)$ defined on Ω yields 1 on T ; this proves (A.16). Now we have:

$$[S]f \cdot \mathsf{w} \geq \int_{A_t} f\mathsf{w} d\mu_S^\infty \quad (\text{A.17})$$

$$= \int_{A_t} \widetilde{(f_t \mathsf{w}_t)} d\mu_S^\infty \quad (\text{A.18})$$

$$= \int_{\mathfrak{c}(L^{\leq t} \cap T^{\leq t})} \widetilde{(f_t \mathsf{w}_t)} d\mu_S^\infty \quad (\text{A.19})$$

$$= \int_{L^{\leq t} \cap T^{\leq t}} (f_t \mathsf{w}_t) d\mu_S^t \quad (\text{A.20})$$

$$= [S]^t f_t \mathsf{w}_t 1_{L^{\leq t} \cap T^{\leq t}} \quad (\text{A.21})$$

where: in the second step we have used (A.16); in the third step we have applied Lemma A.3 and the fact that $\mathfrak{c}(L^{\leq t} \cap T^{\leq t}) \cap \Theta = A_t$; and in the last but one step, Lemma A.1 with $h = f_t \mathsf{w}_t$ and $B_t = L^{\leq t} \cap T^{\leq t}$.

The bounds in (A.13), (A.14) and (A.21) imply the wanted bounds (5.1). \square

Proof of Theorem 2. We first show that $\llbracket S \rrbracket f$ is well defined, that is that $[S]\mathsf{w} > 0$. Indeed, from Lemma A.4, and from $[S]^t 1_{\mathsf{T}^{\leq t}} \cdot \mathsf{w}_t > 0$ for at least one t , we get $[S]1_{\mathsf{T}_f} \cdot \mathsf{w} > 0$; since $1_{\mathsf{T}_f} \cdot \mathsf{w} \leq \mathsf{w}$, we get $[S]1_{\mathsf{T}_f} \cdot \mathsf{w} \leq [S]\mathsf{w}$, hence the wanted statement.

Now consider $\llbracket S \rrbracket f = \frac{[S]f \cdot \mathsf{w}}{[S]\mathsf{w}}$, for f like in the hypothesis, and the inequalities in (5.2).

Consider the following bounds for the numerator and denominator of this fraction.

$$[S]^t f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}} \cdot \mathsf{w}_t \leq [S]f \cdot \mathsf{w} \leq [S]^t f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}} \cdot \mathsf{w}_t + M([S]^t \mathsf{w}_t - [S]^t 1_{\mathsf{T}^{\leq t}} \cdot \mathsf{w}_t) \quad (\text{A.22})$$

$$[S]^t 1_{\mathsf{T}^{\leq t}} \cdot \mathsf{w}_t \leq [S]\mathsf{w} \leq [S]^t \mathsf{w}_t. \quad (\text{A.23})$$

The bounds in (A.22) are just those in Lemma 2, with the term $M \cdot (\dots)$ written in an equivalent form. As to (A.23), first apply the bounds of Lemma 2 to the constant function $f = 1$. Note that this f is measurable, and is trivially prefix closed for the prefix-free sequence of languages $L_0 = \{\epsilon\}$ and $L_j = \emptyset$ for $j > 0$. As a consequence, for $t \geq 1$, over Ω^t we have $L^{\leq t} = \Omega^t$, hence $1_{L^{\leq t} \cap T^{\leq t}} = 1_{\mathsf{T}^{\leq t}}$. Moreover $f_t = M = 1$ identically. From these facts, it is immediate to see that the bounds (5.1) of Lemma 2 specialize to (A.23). From the above established bounds (A.22) and (A.23) for the numerator and denominator of $\llbracket S \rrbracket f = \frac{[S]f \cdot \mathsf{w}}{[S]\mathsf{w}}$,

it follows that

$$\frac{[S]^t f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}} \cdot w_t}{[S]^t w_t} \leq \llbracket S \rrbracket f \leq \frac{[S]^t f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}} \cdot w_t}{[S]^t 1_{T^{\leq t}} \cdot w_t} + M \cdot \left(\frac{[S]^t w_t}{[S]^t 1_{T^{\leq t}} \cdot w_t} - 1 \right). \quad (\text{A.24})$$

Now, multiplying and dividing the first term of the above upper bound by $[S]^t w_t$, positive by hypothesis, and recalling the definition of α_t , the wanted (5.2) follows. \square

Proof of Theorem 3. Write (5.2) in the form (A.24). We discuss the limit as $t \rightarrow +\infty$ of each of the three distinct involved terms .

- (1) $[S]^t f_t 1_{L^{\leq t} \cap T^{\leq t}} w_t \rightarrow \int f w d\mu_S^\infty = [S]fw$. Consider the set $A_t = \Theta^{\leq t} \cdot \top^\infty \cap \mathbf{c}(L^{\leq t} \cap T^{\leq t})$ introduced in (A.15). We have the equalities

$$\begin{aligned} [S]^t f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}} \cdot w_t &= \int_{A_t} f \cdot w d\mu_S^\infty \\ &= \int f \cdot w \cdot 1_{\mathbf{c}(T^{\leq t} \cap L^{\leq t})} d\mu_S^\infty \end{aligned} \quad (\text{A.25})$$

where: the first equality has been proven in (A.17)–(A.21), and the second one follows from Lemma A.3 and the equality $A_t \cap \Theta = \mathbf{c}(T^{\leq t} \cap L^{\leq t}) \cap \Theta$. Now $1_{\mathbf{c}(T^{\leq t} \cap L^{\leq t})}$ converges pointwise to $1_{T_f \cap \text{supp}(f)}$, by definition of $\text{supp}(f) = \cup_{j \geq 0} \mathbf{c}(L_j)$: in particular, for each $\tilde{\omega}$ we have that, for each t large enough, $1_{\mathbf{c}(T^{\leq t} \cap L^{\leq t})}(\tilde{\omega}) = 1_{T_f \cap \text{supp}(f)}(\tilde{\omega})$. This in turn implies that $f \cdot w \cdot 1_{\mathbf{c}(T^{\leq t} \cap L^{\leq t})}$ converges pointwise to $f \cdot w \cdot 1_{T_f \cap \text{supp}(f)} = f \cdot w \cdot 1_{T_f}$ (even if f takes on the value $+\infty$). Moreover, the sequence of functions $f \cdot w \cdot 1_{\mathbf{c}(T^{\leq t} \cap L^{\leq t})}$ is monotonically nondecreasing. By the Monotone Convergence Theorem [2, Th.1.6.2], the integral in (A.25) then converges to $\int f \cdot w \cdot 1_{T_f} d\mu_S^\infty = \int f \cdot w d\mu_S^\infty$, where the last equality stems from $\mu_S^\infty(T_f) = 1$ and again Lemma A.3.

- (2) $[S]^t w_t \rightarrow [S]w$. By taking $B_t = \Omega^t$ in Lemma A.1, we have: $[S]^t w_t = \int w_t d\mu_S^t = \int \tilde{w}_t d\mu_S^\infty$. Moreover, the sequence of functions \tilde{w}_t converges pointwise to w , and all these function are dominated by e.g. 1, which is integrable. Applying the Dominated Convergence Theorem [2, 1.6.9], we obtain $\int \tilde{w}_t d\mu_S^\infty \rightarrow \int w_t d\mu^\infty = [S]w$, which is the wanted statement.

- (3) $[S]^t 1_{T^{\leq t}} \cdot w_t \rightarrow [S]w$. Apply the first item above to the constant function $f = 1$. Note that this f is trivially prefix-closed with $L_0 = \{\epsilon\}$, hence $L^{\leq t} = \Omega^t$ for each $t \geq 1$.

As to (5.3), we have $[S]^t 1_{T^{\leq t}} w_t = \int_{T^{\leq t}} w_t d\mu_S^t = \int w_t d\mu_S^t = [S]^t w_t$, which follows from the hypothesis $\mu_S^t(T^{\leq t}) = 1$ and from elementary measure-theoretic reasoning. Therefore $\alpha_t = 1$ and from (5.2) we obtain that the lower and upper bounds on $\llbracket S \rrbracket f$ coincide with $\frac{[S]^t f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}} \cdot w_t}{[S]^t w_t}$. Now we check that

$$f_t \cdot 1_{T^{\leq t}} = f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}}.$$

Indeed, as $\text{supp}(f_t) \subseteq L^{\leq t} \cup L^{>t}$, one can consider two cases for $\omega^t \in \text{supp}(f_t)$. Either $\omega^t \in \text{supp}(f_t) \cap L^{\leq t}$: then we have by definition that $(f_t \cdot 1_{T^{\leq t}})(\omega^t) = (f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}})(\omega^t)$. Or $\omega^t \in \text{supp}(f_t) \cap L^{>t}$: then we have $\omega^t \notin T^{\leq t}$ (Lemma A.5), hence again $(f_t \cdot 1_{T^{\leq t}})(\omega^t) = (f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}})(\omega^t) = 0$. Finally, we can compute as follows: $[S]^t f_t \cdot w_t = [S]^t f_t \cdot 1_{T^{\leq t}} \cdot w_t = [S]^t f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}} \cdot w_t$, where the first equality follows from $\mu(T^{\leq 1}) = 1$ and elementary measure-theoretic reasoning, and the second one from the above established equality. This completes the proof of (5.3). \square

The following result is useful to relate our semantics to the filtering distribution of a Feynman-Kac model. Here we let $\text{pr}_j : \Omega^t \rightarrow \Omega$ ($1 \leq j \leq t$) denote the projection on the j th component; this is a measurable function. The result basically says that taking the expectation of f_t on paths of length t is the same as taking the expectation of $h \circ \text{pr}_t$, that only looks at the last state of a path.

Lemma A.6. *Let $f = \check{h}$ for a nonnegative measurable h defined on Ω . For each S and $t \geq 1$, we have $[S]^t f_t \cdot 1_{L \leq t} \cdot \mathbf{w}_t = [S]^t (h \circ \text{pr}_t) \cdot \mathbf{w}_t$, where L_j ($j \geq 0$) are the branches of f .*

Proof. We first prove a general statement about the measures μ_S^t . Recall that we use ω^t to range over tuples $(\omega_1, \dots, \omega_t)$. Let $g : \Omega^t \rightarrow \overline{\mathbb{R}}^+$ be a measurable function. For each $1 \leq j \leq t$, let $\eta_j(\omega^t) := [\omega_{j+1} = \omega_j] \cdots [\omega_t = \omega_j]$ the predicate that yields 1 if and only if $\omega_j = \cdots = \omega_t$. Then, recalling that $T_j = (\mathbb{T}^c)^{j-1} \cdot \mathbb{T}$, we have

$$\int_{T_j \cdot \Omega^{t-j}} \mu_S^t(d\omega^t) g(\omega^t) = \int_{T_j \cdot \Omega^{t-j}} \mu_S^t(d\omega^t) g(\omega^t) \cdot \eta_j(\omega^t). \quad (\text{A.26})$$

This equality can be checked as follows. First, write the integral on the left- (resp. right-) hand side of (A.26) as an iterated integral, via Theorem A.1(b) (Fubini): in the resulting expression, call H_j (resp. K_j) the expression corresponding to the $t - j$ innermost iterated integrals. For each $\omega_1, \dots, \omega_j$, we have the following equalities

$$\begin{aligned} H_j &= \int \kappa(\omega_j)(d\omega_{j+1}) \int \kappa(\omega_{j+1})(d\omega_{j+2}) \cdots \int \kappa(\omega_{t-1})(d\omega_t) g(\omega^t) \cdot 1_{T_j \cdot \Omega^{t-j}}(\omega^t) \\ &= g(\omega_1, \dots, \omega_{j-1}, \omega_j, \dots, \omega_j) \cdot 1_{\mathbb{T}^c}(\omega_1) \cdots 1_{\mathbb{T}^c}(\omega_{j-1}) \cdot 1_{\mathbb{T}}(\omega_j) \end{aligned} \quad (\text{A.27})$$

$$= g(\omega_1, \dots, \omega_{j-1}, \omega_j, \dots, \omega_j) \cdot 1_{\mathbb{T}^c}(\omega_1) \cdots 1_{\mathbb{T}^c}(\omega_{j-1}) \cdot 1_{\mathbb{T}}(\omega_j) \cdot \eta_j(\omega_1, \dots, \omega_{j-1}, \omega_j, \dots, \omega_j) \quad (\text{A.28})$$

$$\begin{aligned} &= \int \kappa(\omega_j)(d\omega_{j+1}) \int \kappa(\omega_{j+1})(d\omega_{j+2}) \cdots \int \kappa(\omega_{t-1})(d\omega_t) g(\omega^t) \cdot \eta_j(\omega^t) \cdot 1_{T_j \cdot \Omega^{t-j}}(\omega^t) \\ &= K_j \end{aligned} \quad (\text{A.29})$$

where: (A.27) is obvious if $\omega_j \notin \mathbb{T}$, as both sides are 0 in this case; if $\omega_j \in \mathbb{T}$, say $\omega_j = (v, \text{nil})$, then $\kappa(\omega_j)(\cdot) = \delta_{\omega_j}(\cdot)$ by definition of κ , and (A.27) follows by a repeated application of the property $\int \delta_\omega(d\omega') q(\omega') = q(\omega)$ of Dirac's measures; (A.28) follows by definition of η_j ; and (A.29) from the same reasoning as for (A.27). Now (A.26) follows by integrating H_j and K_j with respect to $\omega_1, \dots, \omega_j$ (note that both sides are measurable functions of $\omega_1, \dots, \omega_j$, by Fubini), and then applying Fubini on both sides, to rewrite the resulting iterated integrals as

integrals over Ω^t . Now we have

$$\int_{T_j \cdot \Omega^{t-j}} \mu_S^t(d\omega^t) (f_t \cdot 1_{L^{\leq t}} \cdot w_t)(\omega^t) = \int_{T_j \cdot \Omega^{t-j}} \mu_S^t(d\omega^t) (f_t \cdot w_t)(\omega^t) \quad (\text{A.30})$$

$$= \int_{T_j \cdot \Omega^{t-j}} \mu_S^t(d\omega^t) (f_t \cdot w_t \cdot \eta_j)(\omega^t) \quad (\text{A.31})$$

$$= \int_{T_j \cdot \Omega^{t-j}} \mu_S^t(d\omega^t) (w_t \cdot \eta_j)(\omega^t) \cdot h(\omega_j) \quad (\text{A.32})$$

$$= \int_{T_j \cdot \Omega^{t-j}} \mu_S^t(d\omega^t) (w_t \cdot \eta_j)(\omega^t) \cdot h(\omega_t) \quad (\text{A.33})$$

$$= \int_{T_j \cdot \Omega^{t-j}} \mu_S^t(d\omega^t) (w_t \cdot \eta_j \cdot (h \circ \text{pr}_t))(\omega^t) \quad (\text{A.34})$$

$$= \int_{T_j \cdot \Omega^{t-j}} \mu_S^t(d\omega^t) ((h \circ \text{pr}_t) \cdot w_t)(\omega^t) \quad (\text{A.35})$$

where one exploits the following equalities, for $\omega^t \in T_j \cdot \Omega^{t-j}$: in (A.30), $(1_{L^{\leq t}} \cdot f_t)(\omega^t) = f_t(\omega^t)$, as $\text{supp}(f_t) \cap T_j \cdot \Omega^{t-j} \subseteq L^{\leq t} \cap T_j \cdot \Omega^{t-j}$; in (A.31), (A.26) with $g = f_t \cdot w_t$; in (A.32), $f_t(\omega^t) = h(\omega_j)$; in (A.33), $\eta_j(\omega^t)h(\omega_j) = \eta_j(\omega^t)h(\omega_t)$; in (A.34), the definition of $h(\omega_t)$ and $\text{pr}_t(\omega^t)$; in (A.35), again (A.26), with $g = (h \circ \text{pr}_t) \cdot w_t$. Now, we have:

$$\begin{aligned} [S]^t f_t \cdot 1_{L^{\leq t}} \cdot w_t &= \int f_t \cdot 1_{L^{\leq t}} \cdot w_t d\mu^t \\ &= \int_{T^{\leq t}} f_t \cdot 1_{L^{\leq t}} \cdot w_t d\mu^t \end{aligned} \quad (\text{A.36})$$

$$= \sum_{j=1}^t \int_{T_j \cdot \Omega^{t-j}} f_t \cdot 1_{L^{\leq t}} \cdot w_t d\mu^t \quad (\text{A.37})$$

$$= \sum_{j=1}^t \int_{T_j \cdot \Omega^{t-j}} (h \circ \text{pr}_t) \cdot w_t d\mu^t \quad (\text{A.38})$$

$$= \int_{T^{\leq t}} (h \circ \text{pr}_t) \cdot w_t d\mu^t \quad (\text{A.39})$$

$$= \int_{\Theta^{\leq t}} (h \circ \text{pr}_t) \cdot w_t d\mu^t \quad (\text{A.40})$$

$$= \int_{\Theta^{\leq t}} (h \circ \text{pr}_t) \cdot w_t d\mu^t + \int_{(\mathbb{T}^c)^t} (h \circ \text{pr}_t) \cdot w_t d\mu^t \quad (\text{A.41})$$

$$= \int_{\Theta_t} (h \circ \text{pr}_t) \cdot w_t d\mu^t \quad (\text{A.42})$$

$$= \int (h \circ \text{pr}_t) \cdot w_t d\mu^t \quad (\text{A.43})$$

where: (A.36) follows from $L^{\leq t} \subseteq T^{\leq t}$; (A.37) from $T^{\leq t} = \cup_{j=1}^t T_j \cdot \Omega^{t-j}$ (disjoint union) and basic properties of integrals; (A.38) from the equality established in (A.30)—(A.35); (A.39) again from $T^{\leq t} = \cup_{j=1}^t T_j \cdot \Omega^{t-j}$; (A.40) from Lemma A.3(b) and $\Theta_t \cap T^{\leq t} = \Theta^{\leq t}$; (A.41) from the fact that $h \circ \text{pr}_t$ is identically 0 on $(\mathbb{T}^c)^t$ as $\text{supp}(h) \subseteq \mathbb{T}$, hence the second integral here is 0; (A.42) from definition of $\Theta_t = \Theta^{\leq t} \cup (\mathbb{T}^c)^t$ (disjoint union); (A.43) again from Lemma A.3(b). \square

Proof of Theorem 4. The following equality is easy to check and will be useful below.

$$\mathbb{E}_{\phi_t}[h] = \frac{\mathbb{E}_{\mu^t}[(h \circ \text{pr}_t) \cdot G]}{\mathbb{E}_{\mu^t}[G]}. \quad (\text{A.44})$$

As for the actual proof, first note that $L^{\leq t} \subseteq T^{\leq t}$ by definition of lifting (Def. 8), hence $f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}} = f_t \cdot 1_{L^{\leq t}}$. Concerning β_L , from the lower bound in (5.2) we have that:

$$\llbracket S \rrbracket f \geq \frac{[S]^t f_t \cdot 1_{L^{\leq t} \cap T^{\leq t}} \cdot \mathbf{w}_t}{[S]^t \mathbf{w}_t} = \frac{[S]^t f_t \cdot 1_{L^{\leq t}} \cdot \mathbf{w}_t}{[S]^t \mathbf{w}_t} = \frac{[S]^t (h \circ \text{pr}_t) \cdot \mathbf{w}_t}{[S]^t \mathbf{w}_t} = \mathbb{E}_{\phi_{S,t}}[h]$$

where in the last but one step we have applied Lemma A.6 to the numerator of the fraction, and in the last step we have applied (A.44) to the model FK_S , with $G = \mathbf{w}_t$ as a global potential.

Concerning β_U , consider the function $f = \check{1}_\top$ (the lifting of the function $h = 1_\top$), which has branches $L_j = T_j$: it is immediate to check that for each $t \geq 1$, $1_{T^{\leq t}} \cdot \mathbf{w}_t = f_t \cdot 1_{T^{\leq t}} \cdot \mathbf{w}_t$. Then we can repeat the reasoning used above for β_L with this function f to prove that $\frac{[S]^t 1_{T^{\leq t}} \cdot \mathbf{w}_t}{[S]^t \mathbf{w}_t} = \mathbb{E}_{\phi_{S,t}}[1_\top]$, that is $\alpha_t = \mathbb{E}_{\phi_{S,t}}[1_\top]^{-1}$. Then the upper bound in (5.2) allows us to complete the proof. \square

APPENDIX B. THE PARTICLE FILTERING ALGORITHM

From a computational point of view, our interest in FK models lies in the fact that they allow for a simple, unified presentation of a class of efficient inference algorithms, known as *Particle Filtering (PF)* [47, 28]. In what follows we present an algorithm to compute the filtering distribution ϕ_t . We will introduce below a general PF algorithm scheme following closely [28, Ch.11].

Fix a generic FK model, $\text{FK} = (\mathcal{X}, t, \mu^1, \{K_i\}_{i=2}^t, \{G_i\}_{i=1}^t)$. Fix $N \geq 1$, the number of *particles*, that is instances of the random process represented by the K_i 's, we want to simulate. For any tuple $W = W^{1:N} = (W^{(1)}, \dots, W^{(N)})$ of real nonnegative random variables, the *weights*, denote by \widehat{W} the normalized version of W , that is⁹ $\widehat{W}^{(i)} = W^{(i)} / (\sum_{j=1}^N W^{(j)})$. A *resampling scheme* for (N, W) is N -tuple of random variables taking values on $1..N$, say $R = (R_1, \dots, R_N)$, such that: for each $i \in 1..N$, letting F_i denote the number of occurrences of i in R , one has

$$\mathbb{E}[F_i | W] = N \cdot \widehat{W}_i.$$

In other words, R is a randomized selection process of N indices out of $1..N$, with repetitions, such that, on average, each index $i \in 1..N$ is selected a number of times proportional to its weight in W . We shall write $R(W)$ to indicate that R depends on a given weight vector W . Various resampling schemes have been proposed in the literature. Perhaps the simplest is letting R be N i.i.d. random variables each distributed according to \widehat{W} : this is known as *multinomial resampling*. We refer the reader to the specialized literature on PF for details and efficient implementation methods, see e.g. [28, Ch.9] and references therein.

Algorithm 1 is a generic PF algorithm. At the k -th iteration, for $k = 1, \dots, t$, two N -tuples are extracted:

- a tuple of states $X_k = X_k^{1:N} = (X_k^{(1)}, \dots, X_k^{(N)}) \in \mathcal{X}^N$;

⁹With the proviso that e.g. $\widehat{W}^{(i)} := 1/N$ in the event all the $W^{(i)}$'s are 0. In the execution of the PF algorithm this event will occur with probability $\rightarrow 0$ as $N \rightarrow +\infty$.

- a tuple of (unnormalized) weights $W_k = W_k^{1:N} = (W_k^{(1)}, \dots, W_k^{(N)}) \in (\mathbb{R}^+)^N$.

The elements of $X_k^{1:N}$ depend on the tuples $X_{k-1}^{1:N}, W_{k-1}$ of the previous iteration. The purpose of the resampling step 4 is to give more importance to particles with higher weight, when extracting the next tuple of particles, while discarding particles with lower weight. In case R is multinomial resampling, steps 4-5 amount to drawing each $X_k^{(j)}$ from the (empirical) distribution $\sum_{j=1}^N \widehat{W}_{k-1}^{(j)} \delta_{K_k(X_{k-1}^{(j)})}$. The weights $W_k^{1:N}$ are computed via the potential function G_k , and will be used in the resampling step at iteration $k+1$, if $k < t$, or returned as part of the algorithm's output.

The following theorem states consistency, in an asymptotic sense, of the PF algorithm with respect to the filtering distribution ϕ_t on \mathcal{X} . Its practical implication is that we can estimate expectations with respect to the filtering distribution as weighted sums. Note that in its statement t is held fixed — it is one of the parameter of the FK model — while the number of particles N tends to $+\infty$.

Theorem B.1 (convergence of PF, [28]). *Consider the random variables (X_t, W_t) ($t \geq 1$) as returned by Algorithm 1. Suppose that the FK measure ϕ is well defined on \mathcal{X}^t . Further assume that $R(\cdot)$ is multinomial resampling and that the potential functions G_k all have a finite upper bound. For each nonnegative measurable function h defined on \mathcal{X} , we have: $\sum_{j=1}^N \widehat{W}_t^{(j)} \cdot h(X_t^{(j)}) \rightarrow \mathbb{E}_{\phi_t}[h]$ almost surely¹⁰ as $N \rightarrow +\infty$.*

APPENDIX C. ADDITIONAL DETAILS ON EXPERIMENTS

We give a more detailed textual description of the considered examples.

- (1) *Aircraft tracking* (AT) [59]. An aircraft is modeled as a point moving on a 2D plan according to a Gaussian process, The aircraft is tracked by six radar: at each discrete time step, each radar noisily measures the distance of the aircraft from its own position; specific distances are being observed. We target the posterior expected value of the final horizontal position of the aircraft. This is by far the most complicated example among those considered here; we provide a detailed description of its coding in terms of a PPG at the end of this section.
- (2) *Drunk man and mouse* (DMM), Example 3. We target the posterior expected value of the drunk man variance.
- (3) *Hare and tortoise* (HT), see e.g. [4]. This model simulates a race between a hare and a tortoise along a one-dimensional line: the tortoise takes a step of length 1 every time step, while the hare occasionally takes a step whose length is Gaussian-distributed. Additionally, at each time step it is observed that the hare and the tortoise are never at a distance more than 10 from each other. The race is terminated as soon as the hare overtakes the turtle. We target the posterior expected value of the final position of the hare.
- (4) *Bounded retransmission protocol*, [40]. A number of packets must be transmitted over a lossy channel, and each packet can be lost with a probability of 0.02. Losses can be observed only during the transmission of the last 80 packets. The transmission is considered successful if none of the packets needs more than 4 retransmissions. We target the posterior expected value of failure probability.

¹⁰See [28, Ch.11] for the precise definition of the probability space where this assertion makes sense.

- (5) *Non-i.i.d. loops*, [40]. This model describes the behaviour of a discrete sampler that keeps tossing two fair coins, until they both turn tails. Additionally, it is observed that at each iteration at least one of the coins yields the same outcome as in the previous iteration. This observation induce data dependencies across consecutive loop iterations. We target the posterior expected value of the number of iterations until termination.

For each model, we draw samples of N particles ($N \in R = \{10^3, 10^4, 10^5, 10^6\}$), and the corresponding weights, with each of the considered tools/algorithms. With the drawn samples and weights, the tools compute the (posterior) expected value of the quantities of interest. For each tool, we are interested in assessing:

- the accuracy of the computed expected values;
- the quality of the drawn samples;
- the performance in terms of execution time.

Concerning accuracy, we do not know the exact value of the targeted expected values (but in one case, see below), so a direct comparison is not possible. Nevertheless, asymptotic consistency of PF and other SMC sampling algorithms, in the sense discussed in subsection 6, guarantees that as $N \rightarrow +\infty$ the sample estimates will converge to the true expected value. For a specific values of N , there is no obvious way to judge how close we are to convergence. Pragmatically, we will take a small difference of estimation between consecutive values of N in the considered range R , and the fact that different tools yield estimates very close to one another, as an empirical evidence of convergence and accuracy. As remarked above, differently from the other considered tools that return truncated point estimates, VPF provides in principle lower and upper bounds of $\llbracket S \rrbracket f$ as an application of Theorem 4. The upper bound will be vacuous ($+\infty$) whenever the target f is unbounded, which is the case for HT and NIID here. Beside, examples AT and BRP are bounded loops, for which $\alpha_t = 1$, hence $\beta_L = \beta_U = \llbracket S \rrbracket f$.

We measure empirically the quality of the drawn samples in terms of *effective sample size (ESS)* [30] of the corresponding weights W_1, \dots, W_N :

$$ESS := \frac{(\sum_{i=1}^N W_i)^2}{\sum_{i=1}^N W_i^2}.$$

ESS is an empirical measure of efficiency of the sampled particles, the higher the better. Specifically, ESS quantifies the number of i.i.d. samples from the target distribution that would be required to achieve the same variance in the estimator as that obtained from the weighted samples. So a ESS close to N indicates that the N particles appear to be drawn i.i.d. from the target distribution.


The experiments have been run on a 2.8 GHz Intel Core i7 PC, with 16GB RAM and Nvidia T500 GPU. VPF and webPPL have been run under Windows 10 OS, with CUDA Toolkit v. 11.8, driver v. 522.06. CorePPL and RootPPL have been run under Ubuntu 22, with CUDA Toolkit v. 12.2, driver v. 535.86.

In Table 1 (Section 7), we report the execution time, the estimated expected value and the effective sample size for VPF, CorePPL, RootPPL and webPPL, as the number N of particles increases. In the case of VPF, a single value estimate is reported for all examples but DMM: for programs AT and BRP this is an estimate of $\llbracket S \rrbracket f$; for examples HT and NIID (unbounded f), this is an estimate the lower bound β_L , being the upper bound vacuous as discussed above. We also remark that for NIID, it is known that $\llbracket S \rrbracket f = \frac{24}{7} = 3.428 \dots$ [40]. We note that, at least for $N \geq 10^5$, the tools tend to yield very similar estimates of

the expected value¹¹, as a consequence of the asymptotic consistency of PF and other SMC algorithms: we take this as an empirical evidence of accuracy.

We end this section with an explicit description of the PPG for AT. An aircraft is modeled as a point moving on a 2D plan according to a Gaussian process, for $t = 1, \dots, 8$ discrete time instants. Throughout these time points, the airplane is tracked by six radar. Each radar is characterized by a radius: at each time, if the aircraft is within the radar’s radius, the radar returns the noisily measured distance from the aircraft, otherwise the radar just returns a noisy version of its own radius. We aim to infer the final horizontal position of the aircraft, i.e. the value of x at time $t = 8$, conditioned on actual observed data obtained from the six radars at all eight time instants.

In the PPG below, o_{ij} is the observed distance at time i from radar j , for $1 \leq i \leq 8$ and $1 \leq j \leq 6$, while (rx_j, ry_j) and r_j are the coordinates and radius of radar j , respectively. The actual numerical data can be found in [59]. Moreover, $B(p)$ is the Bernoulli distribution of parameter p , while $N_T(a, b, c, d)$ represents the Normal density of mean c and standard deviation d truncated at $[a, b]$; $N_T(a, b, c, d)(z)$ is the value at z of this density.

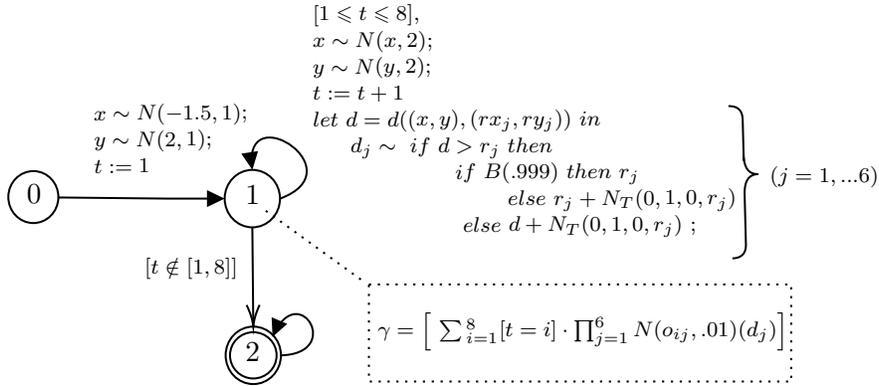

Finally, we report an enlarged version of the plots of Fig. 2.

APPENDIX D. PROBABILISTIC PROGRAMS PSEUDO-CODE

We consider the following probabilistic models described for example in [34]. For convenience, the programs are described in the language of [34], which is based on sequential composition, but they are easy to translate into our language. The **return** statement at the end of each program describes the function f considered in the estimation of $\llbracket S \rrbracket f$; e.g. the DMM example, **return** r means f is the lifting of the function $(d, r, x, y, S) \mapsto r$.

¹¹An exception is represented by the result returned by CorePPL for the NIID example. The results of the other three tools agree with each other and with the exact value $\frac{24}{7} = 3.428 \dots$, though.

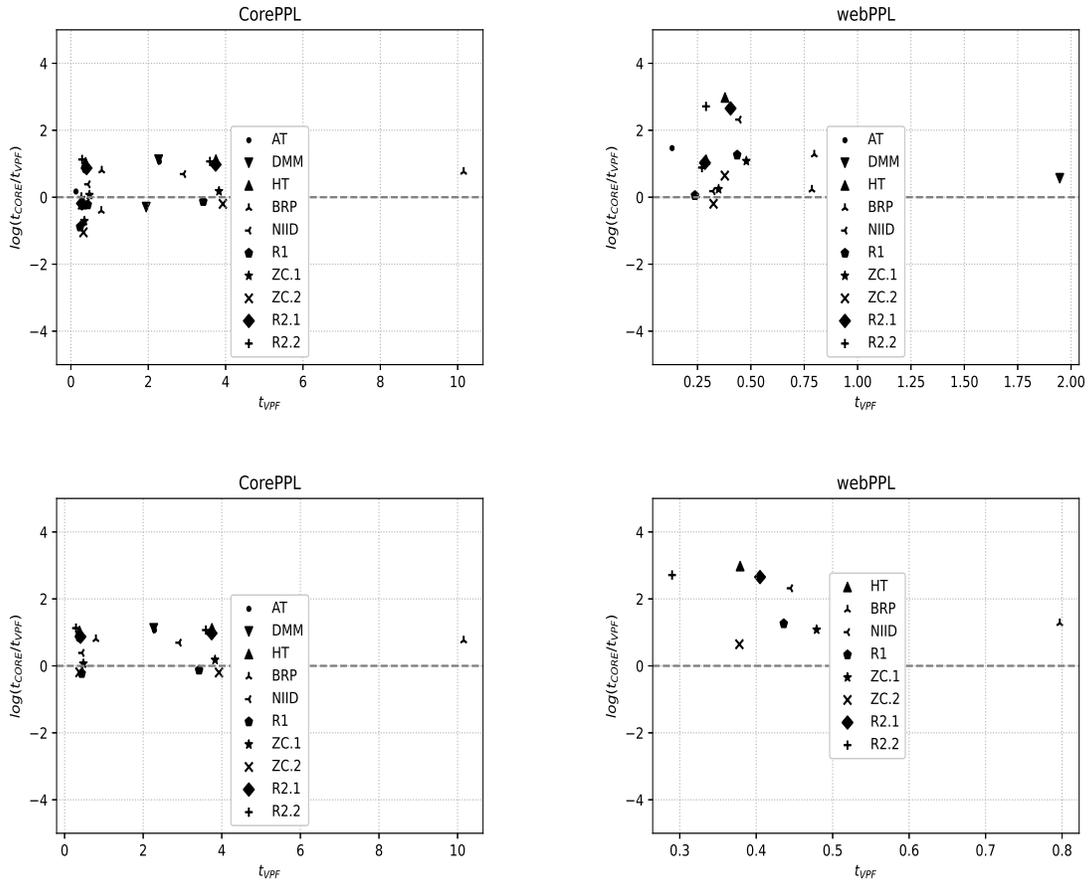


FIGURE 4. Enlarged version of plots in Fig. 2.

```

1: p=uniform(0,1);
2: start=1;
3: curprobe,established=0;
4: while(curprobe < 100 && established <=0 && start <= 1){
5:   if(start = 1){
6:     flag=Bernoulli(p)
7:     if (flag==false){
8:       established=1;
9:     }
10:    start=0;
11:   }else{
12:     flag=Bernoulli(lambda)
13:     if (flag==true){
14:       curprobe := curprobe + 1;
15:     }else{
16:       observe(curprobe>=20);
17:       start=1;
18:       curprobe=0;
19:     }
20:   }
21: }
22: return p;

```

(G) ZeroConf (ZC.1: $\lambda = 0.99$, ZC.2: $\lambda = 0.5$).

```

1: var=uniform(0,7);
2: y=1;
3: prob=0.5;
4: i=0;
5: while(i <= 100){
6:   oldy=y;
7:   y=Gaussian(oldy,2*var);
8:   flag=Bernoulli(lambda);
9:   if(flag){
10:    observe(|y-oldy|<2);
11:    i=i+1;}
12: return y;
13:
14:
15:
16:
17:
18:
19:
20:
21:

```

(H) Random Walk (RW2.1: $\lambda = 0.5$, RW2.2: $\lambda = 0.9999$).

```

1: while(time<=8){
2:   float[] radius;
3:   float obs-dist;
4:   if(time==0){
5:     x = Gaussian(2,1);
6:     y = Gaussian(-1.5,1);
7:   }else{
8:     x = Gaussian(x,2);
9:     y = Gaussian(y,2);
10:    for i in (0,6){
11:      d= compute-distance(i,x,y);
12:      if(d>radius[i]){
13:        flag=Bernoulli(0.999);
14:        if (flag==true){
15:          obs-dist=radius[i];
16:        }else{
17:          obs-dist=radius[i]+0.001*
18:            trunc-gauss(0,radius[i]);
19:        }
20:      }else{
21:        obs-dist=d+0.1*trunc-gauss(0,radius[i]);
22:      }
23:      obs-dist1 = Gaussian(obs-dist,0.01);
24:      observe(obs-dist1==...); //evidence numbers
25:      omitted
26:    }
27:    time=time+1;
28:  }
29: return x

```

(A) Aircraft Tracking (AT).

```

1: d=uniform(0,2);
2: r=uniform(0,1);
3: x=-1;
4: y=1;
5: while(|x-y|<1/10){
6:   x=Gaussian(x,d);
7:   y=Gaussian(y,r);
8:   observe(|x-y|<=3);
9: }
10: return r;
11:
12:
13:
14:
15:
16:
17:
18:
19:
20:
21:
22:
23:
24:
25:
26:
27:
28:
29:

```

(B) Drunk Man and Mouse (DMM).

```

1: initialPos=uniform(0,10);
2: tortoise=initialPos;
3: hare=0;
4: n=0;
5: while(hare<tortoise){
6:   n=n+1;
7:   tortoise=tortoise+1
8:   flag=Bernoulli (2/5);
9:   if (flag==true){
10:    hare=hare+Gaussian(4,2);
11:  }
12:  observe(|hare-tortoise|<=10);
13: }
14: observe((n>=20));
15: return hare;
16:
17:
18:

```

(C) Hare and Tortoise (HT).

```

1: initialPos=uniform(0,10);
2: s=100;
3: f=0;
4: t=0;
5: n=0;
6: while(s>0 && f<=4 && t<=280){
7:   t=t+1;
8:   flag=Bernoulli(0.2);
9:   if (flag==1){
10:    f=f+1;
11:    n=n+1;
12:    observe((s<=80));
13:  }else{
14:    f=0;
15:    s=s-1;
16:  }
17: }
18: return s>0;

```

(D) Bounded Retransmission Protocol (BRP).

```

1: a0=1;
2: b0=1;
3: c0=1;
4: d0=1;
5: n=0;
6: while((a0==1 || b0==1)){
7:   a1=Bernoulli(0.5);
8:   b1=Bernoulli(0.5);
9:   observe(c0==a1 || d0==b1);
10:  c1=a1;
11:  d1=b1;
12:  n=n+1;
13: }
14: return n

```

(E) Non-i.i.d. loops (NIID).

```

1: r=uniform(0,1);
2: y=0;
3: n=0;
4: while(|y|<1 && (n<=100)){
5:   y=Gaussian(y,2r);
6:   n=n+1;
7: }
8: observe(n>=3);
9: return r;
10:
11:
12:
13:
14:

```

(F) Random Walk (RW1).