






Waveguide Switch - LM Series - WR28

REV. B

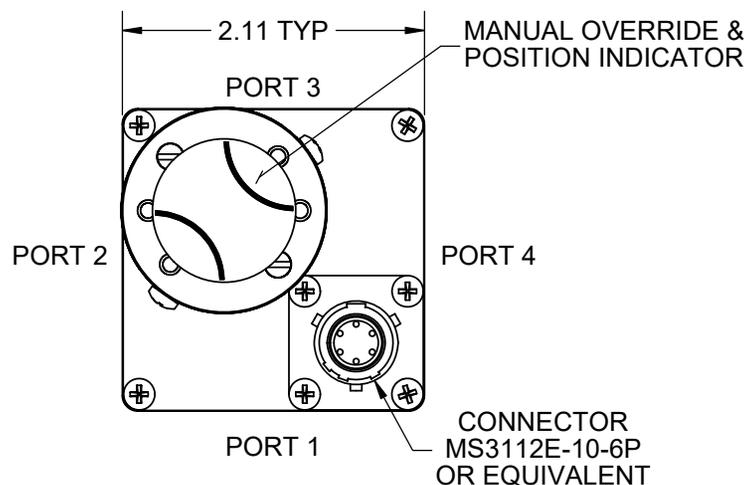

4X FLANGE MOUNTING HOLES
4-40 UNC - 2B ∇ .19
TYP ALL PORTS
(metric threads available)

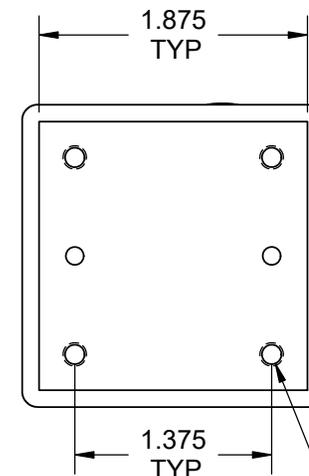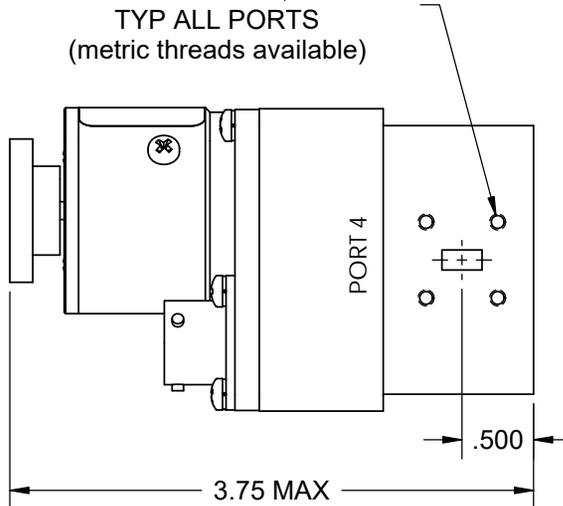


MOUNTING HOLES
8-32 UNC - 2B ∇ .31
(metric threads available)

(See Model # Chart to select options)

ELECTRICAL CIRCUIT OPTIONS

NO INDICATORS
1 SET INDICATORS
2 SETS INDICATORS
3 SETS INDICATORS
4 SETS INDICATORS
INHIBIT CIRCUITS

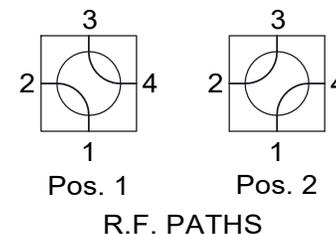

Frequency: 26.5 to 40.0 GHz
VSWR: 1.15:1 Max.
Insertion Loss: 0.15 dB Max.
Isolation: 55 dB Min.

Flange: See Flange Table
Voltage: See Voltage Table
Switching Time: 80 mS Max.


Material: Aluminum (RF Assy)
Finish: Iridite per MIL-DTL-5541
Paint Dull Black Enamel
Pressure: 30 PSIG (RF Head Only)
Drive: Patented Logus I Motor

Temp: Operating: -40 °C to +85 °C
Non-Operating: -55 °C to +100 °C
Humidity: 0 to 95%, No Condensation

DRIVE OPTIONS
LATCHING
PULSE LATCHING
FAILSAFE

VOLTAGE OPTIONS
12 VDC
15 VDC
24 VDC
28 VDC
48 VDC
115 VAC

FLANGE OPTIONS
COVER
GROOVE
CHOKE

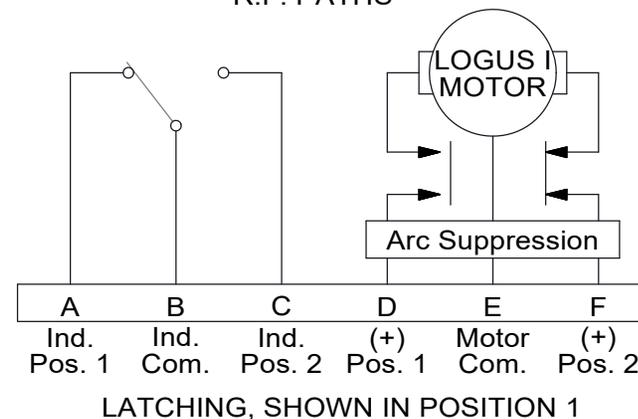

(See Schematic page for optional Electrical Circuits)

RoHS Available